



CT-R430M YZ(ST)

CT-R410 YZ(ST)

CT-R420 YZ(ST)

CT-RV425 YZ(ST)

CT-X430 YZ(ST), YH(ST)

CT-X4300 YL(ST)

SERVICE MANUAL

STEREO CAR CASSETTE RECEIVER

BASIC TAPE MECHANISM : CDS-363AG1-A

- Replace this Service Manual with "Revision Publishing" when it is issued.

aiwa

S/M Code No. 09-003-339-2T2

SIMPLE

DATA

ELECTRICAL MAIN PARTS LIST - 1

NOTE: The characters in the suffix column indicate the part usage.

R430M YZ	XX	A
R410 YZ	XX	B
R420 YZ	XX	C
RV425 YZ	XX	D
X430M YZ	XX	F
X430M YH	XX	G
X4300M YL	XX	H

REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
C	709	87-010-178-080	0E CHIP CAP 1000P	A
C	703	87-010-196-080	0E CHIP CAPACITOR,0.1-25	A
C	707	87-010-196-080	0E CHIP CAPACITOR,0.1-25	A
C	708	87-010-197-080	0E CAP, CHIP 0.01 DM	A
C	704	87-010-198-080	0E CAP, CHIP 0.022	A
C	706	87-010-314-080	0E C-CAP,S 22P-50V	A
C	705	87-010-315-080	0E C-CAP,S 27P-50 CH	A
C	701	87-010-490-040	0E CAP, ELECT 0.1-50	A
C	702	87-010-555-040	0E CAP,E 100-10 GAS	A
C	710	87-010-178-080	0E CHIP CAP 1000P	A
C	711	87-010-322-080	0E C-CAP,S 100P-50 CH	A
C	741	87-016-526-080	0E C-CAP,S 0.47-16 BK	A
C	743	87-016-526-080	0E C-CAP,S 0.47-16 BK	A
C	742	87-016-526-080	0E C-CAP,S 0.47-16 BK	A
C	744	87-016-669-080	0E C-CAP,S 0.1-25 K B	A
D	701	87-020-465-080	0E DIODE,1SS133 (110MA)	A
D	707	87-020-465-080	0E DIODE,1SS133 (110MA)	A
D	702	87-020-465-080	0E DIODE,1SS133 (110MA)	A
D	705	87-020-465-080	0E DIODE,1SS133 (110MA)	A
D	741	87-A40-830-040	0E DIODE,KDS226-RTK	A
IC	701	87-A21-530-030	2M C-IC,UPD178018A-XXX	A
L	701	87-003-149-080	0E COIL,47UH	A
LED	701	87-027-262-010	0E LEDE,TLR-124(RED)	A
Q	701	87-A30-470-040	C-TR,KTC3875SY-RTK	A
SW	701	87-A91-070-010	0E SW,TACT SKHHLV	A
SW	702	87-A91-152-010	1A SW,SL 1-1-2 SSSS212-11-A	A
X	701	87-A70-175-010	1B VIB,XTAL 4.5MHZ AT-49	A
C	201	87-010-178-080	0E CHIP CAP 1000P	A
C	202	87-010-178-080	0E CHIP CAP 1000P	A
C	207	87-010-198-080	0E CAP, CHIP 0.022	A
C	208	87-010-198-080	0E CAP, CHIP 0.022	A
C	209	87-010-494-040	0E CAP,E 1-50 GAS	A
C	204	87-010-498-040	0E CAP,E 10-16 GAS	A
C	203	87-010-498-040	0E CAP,E 10-16 GAS	A
C	205	87-010-555-040	0E CAP,E 100-10 GAS	A
C	206	87-010-555-040	0E CAP,E 100-10 GAS	A
C	212	87-010-380-080	0E CAP, ELECT 47-16V	A
C	210	87-010-494-040	0E CAP,E 1-50 GAS	A
C	213	87-010-494-040	0E CAP,E 1-50 GAS	A
C	214	87-010-494-040	0E CAP,E 1-50 GAS	A
C	215	87-010-555-040	0E CAP,E 100-10 GAS	A
C	211	87-010-555-040	0E CAP,E 100-10 GAS	A
CN	201	87-009-031-010	0E CONNECTOR, 3P	A
CN	202	87-099-408-010	0E CONN,8P EH V WHT	A
CNA	201	8Z-KTA-607-010	CONN ASSY,3P DECK-1	A
CNA	202	8Z-KTG-652-010	CONN ASSY,8P MOTOR	A
IC	201	87-A21-191-010	IC,KIA6225S	A
Q	201	87-A30-295-010	TR,KRA226M	A
Q	204	87-A30-470-040	C-TR,KTC3875SY-RTK	A
Q	203	87-A30-470-040	C-TR,KTC3875SY-RTK	A
Q	202	87-A30-487-080	TR,KRC111M-AT	A
C	102	87-010-178-080	0E CHIP CAP 1000P	A
C	101	87-010-178-080	0E CHIP CAP 1000P	A
C	103	87-010-186-080	0E CAP,CHIP 4700P	A
C	109	87-010-196-080	0E CHIP CAPACITOR,0.1-25	A
C	108	87-010-197-080	0E CAP, CHIP 0.01 DM	A
C	106	87-010-198-080	0E CAP, CHIP 0.022	A
C	104	87-010-490-040	0E CAP, ELECT 0.1-50	A
C	107	87-010-494-040	0E CAP,E 1-50 GAS	A
C	105	87-010-553-040	0E CAP,E 47-16 GAS	A
C	118	87-010-178-080	0E CHIP CAP 1000P	A
C	111	87-010-196-080	0E CHIP CAPACITOR,0.1-25	A
C	117	87-010-197-080	0E CAP, CHIP 0.01 DM	A
C	116	87-010-197-080	0E CAP, CHIP 0.01 DM	A
C	112	87-010-198-080	0E CAP, CHIP 0.022	A
C	113	87-010-198-080	0E CAP, CHIP 0.022	A
C	115	87-010-494-040	0E CAP,E 1-50 GAS	A
C	114	87-010-494-040	0E CAP,E 1-50 GAS	A
C	119	87-010-553-040	0E CAP,E 47-16 GAS	A
C	110	87-010-553-040	0E CAP,E 47-16 GAS	A
C	120	87-010-196-080	0E CHIP CAPACITOR,0.1-25	A
C	121	87-010-197-080	0E CAP, CHIP 0.01 DM	A
D	102	87-020-465-080	0E DIODE,1SS133 (110MA)	A
D	101	87-020-465-080	0E DIODE,1SS133 (110MA)	A
J	101	8Z-KT1-614-010	1A ANT,AW-002	A
L	101	87-003-143-080	0E COIL 4.7 UH	A
L	102	8Z-KT1-619-010	1A COIL,68MH K7-D	A
Q	109	87-A30-295-010	TR,KRA226M	A
Q	101	87-A30-467-040	C-TR,KRA111S-RTK	A
Q	106	87-A30-467-040	C-TR,KRA111S-RTK	A
Q	105	87-A30-470-040	C-TR,KTC3875SY-RTK	A

ELECTRICAL MAIN PARTS LIST -2

Q	108	87-A30-470-040	C-TR,KTC3875SY-RTK	A.....
Q	107	87-A30-470-040	C-TR,KTC3875SY-RTK	A.....
Q	103	87-A30-470-040	C-TR,KTC3875SY-RTK	A.....
Q	102	87-A30-470-040	C-TR,KTC3875SY-RTK	A.....
Q	104	87-A30-471-040	C-TR,KTA1504SY-RTK	A.....
Q	110	87-A30-473-080	TR,KRC102M-AT	A.....
TU	101	8A-KC8-620-010	2B TU UNIT, FAE347-A11	A.....
C	1103	87-010-175-080	0E CAP 560P	A.....
C	1104	87-010-196-080	0E CHIP CAPACITOR,0.1-25	A.....
C	1102	87-010-315-080	0E C-CAP,S 27P-50 CH	A.....
C	1106	87-010-495-040	0E CAP,E 2.2-50 GAS	A.....
C	1101	87-012-149-080	0E C-CAP,S 30P-50 CH	A.....
C	1105	87-012-157-080	0E C-CAP,S 330P-50 CH	A.....
IC	1101	88-KT1-607-080	1H C-IC,SAA6579T	A.....
X	1101	87-A70-091-010	1B VIB,XTAL 4.332MHZ CSA-309	A.....
C	505	87-010-184-080	0E CHIP CAPACITOR 3300P(K)	A.....
C	506	87-010-184-080	0E CHIP CAPACITOR 3300P(K)	A.....
C	508	87-010-198-080	0E CAP, CHIP 0.022	A.....
C	507	87-010-198-080	0E CAP, CHIP 0.022	A.....
C	502	87-010-494-040	0E CAP,E 1-50 GAS	A.....
C	504	87-010-494-040	0E CAP,E 1-50 GAS	A.....
C	503	87-010-494-040	0E CAP,E 1-50 GAS	A.....
C	501	87-010-494-040	0E CAP,E 1-50 GAS	A.....
C	509	87-010-498-040	0E CAP,E 10-16 GAS	A.....
C	519	87-010-196-080	0E CHIP CAPACITOR,0.1-25	A.....
C	516	87-010-498-040	0E CAP,E 10-16 GAS	A.....
C	515	87-010-498-040	0E CAP,E 10-16 GAS	A.....
C	510	87-010-498-040	0E CAP,E 10-16 GAS	A.....
C	518	87-010-498-040	0E CAP,E 10-16 GAS	A.....
C	517	87-010-553-040	0E CAP,E 47-16 GAS	A.....
C	512	87-016-083-080	0E C-CAP,S 0.15-16 RK	A.....
C	511	87-016-083-080	0E C-CAP,S 0.15-16 RK	A.....
C	513	87-016-083-080	0E C-CAP,S 0.15-16 RK	A.....
C	514	87-016-083-080	0E C-CAP,S 0.15-16 RK	A.....
C	527	87-010-184-080	0E CHIP CAPACITOR 3300P(K)	A.....
C	526	87-010-491-040	0E CAP,E 0.22-50 GAS	A.....
C	525	87-010-491-040	0E CAP,E 0.22-50 GAS	A.....
C	523	87-010-494-040	0E CAP,E 1-50 GAS	A.....
C	522	87-010-494-040	0E CAP,E 1-50 GAS	A.....
C	521	87-010-494-040	0E CAP,E 1-50 GAS	A.....
C	520	87-010-494-040	0E CAP,E 1-50 GAS	A.....
C	524	87-010-553-040	0E CAP,E 47-16 GAS	A.....
D	501	87-020-465-080	0E DIODE,1SS133 (110MA)	A.....
IC	501	8Z-KT1-622-010	2A C-IC,LC75374E	A.....
Q	504	87-026-576-080	0E C-TR,DTC343TK	A.....
Q	503	87-026-576-080	0E C-TR,DTC343TK	A.....
Q	501	87-026-576-080	0E C-TR,DTC343TK	A.....
Q	502	87-026-576-080	0E C-TR,DTC343TK	A.....
Q	506	87-A30-467-040	C-TR,KRA111S-RTK	A.....
Q	508	87-A30-467-040	C-TR,KRA111S-RTK	A.....
Q	507	87-A30-467-040	C-TR,KRA111S-RTK	A.....
Q	505	87-A30-484-040	0E C-TR,KRA102S	A.....
C	607	87-010-180-080	0E C-CER 1500P	A.....
C	608	87-010-180-080	0E C-CER 1500P	A.....
C	606	87-010-180-080	0E C-CER 1500P	A.....
C	605	87-010-180-080	0E C-CER 1500P	A.....
C	609	87-010-498-040	0E CAP,E 10-16 GAS	A.....
C	603	87-016-083-080	0E C-CAP,S 0.15-16 RK	A.....
C	602	87-016-083-080	0E C-CAP,S 0.15-16 RK	A.....
C	601	87-016-083-080	0E C-CAP,S 0.15-16 RK	A.....
C	604	87-016-083-080	0E C-CAP,S 0.15-16 RK	A.....
C	611	87-010-196-080	0E CHIP CAPACITOR,0.1-25	A.....
C	613	87-010-490-040	0E CAP, ELECT 0.1-50	A.....
C	612	87-010-552-040	0E CAP,E 22-16 GAS	A.....
C	610	8Z-KT1-633-090	1B CAP,E 3300U-16 PW	A.....
D	601	87-001-783-080	0E DIODE,1N4002	A.....
D	608	87-001-783-080	0E DIODE,1N4002	A.....
D	603	87-001-783-080	0E DIODE,1N4002	A.....
D	602	87-001-783-080	0E DIODE,1N4002	A.....
D	606	87-001-783-080	0E DIODE,1N4002	A.....
D	607	87-001-783-080	0E DIODE,1N4002	A.....
D	605	87-001-783-080	0E DIODE,1N4002	A.....
D	604	87-001-783-080	0E DIODE,1N4002	A.....
IC	601	8Z-KTG-622-010	2A IC,TA8259H	A.....
C	802	87-010-182-080	0E C-CAP,S 2200P-50 B	A.....
C	804	87-010-196-080	0E CHIP CAPACITOR,0.1-25	A.....
C	801	87-010-196-080	0E CHIP CAPACITOR,0.1-25	A.....
C	808	87-010-198-080	0E CAP, CHIP 0.022	A.....
C	805	87-010-498-040	0E CAP,E 10-16 GAS	A.....
C	806	87-010-498-040	0E CAP,E 10-16 GAS	A.....
C	807	87-010-498-040	0E CAP,E 10-16 GAS	A.....
C	810	87-010-198-080	0E CAP, CHIP 0.022	A.....
C	811	87-010-553-040	0E CAP,E 47-16 GAS	A.....
CN	801	8Z-KT1-624-010	CONN,16P SOC017	A.....
D	802	87-001-783-080	0E DIODE,1N4002	A.....
D	804	87-017-931-080	0E ZENER,MTZJ5.6B	A.....
D	801	87-070-022-010	0E DIODE,IN5402 (RECT)	A.....
D	803	87-070-334-080	0E ZENER,MTZJ10B	A.....
D	805	87-A40-337-080	0E ZENER,MTZJ 6.8B	A.....
D	807	87-A40-509-080	0E ZENER,MTZJ6.8C	A.....
D	806	87-A40-523-080	0E ZENER,MTZJ9.1B	A.....
F	801	8Z-KC1-621-010	1B FUSE,15A 32V	A.....
L	801	8Z-KT1-615-010	1C FLTR,AMORPHOUS -CHOKE	A.....

ELECTRICAL MAIN PARTS LIST - 3

Q	806	87-A30-473-080	TR,KRC102M-AT	A.....
Q	803	87-A30-473-080	TR,KRC102M-AT	A.....
Q	804	87-A30-473-080	TR,KRC102M-AT	A.....
Q	805	87-A30-475-080	TR,KRA104M-AT	A.....
Q	802	87-A30-476-010	TR,KTA1046Y	A.....
Q	807	89-423-953-010	1A TR,2SD2395F	A.....
Q	808	89-423-953-010	1A TR,2SD2395F	A.....
Q	809	8Z-KTH-626-080	TR,KTC3203Y	A.....
Q	801	8Z-KTH-627-080	TR,KTA1273Y	A.....
Q	811	87-A30-473-080	TR,KRC102M-AT	A.....
Q	812	87-A30-473-080	TR,KRC102M-AT	A.....
Q	813	8Z-KTH-623-080	TR,KTA1267Y	A.....
Q	810	8Z-KTH-626-080	TR,KTC3203Y	A.....
C	304	87-010-178-080	0E CHIP CAP 1000P	A.....
C	303	87-010-178-080	0E CHIP CAP 1000P	A.....
C	301	87-010-401-080	0E CAP, ELECT 1-50V	A.....
C	302	87-010-401-080	0E CAP, ELECT 1-50V	A.....
C	714	87-010-197-080	0E CAP, CHIP 0.01 DM	A.....
C	713	87-010-197-080	0E CAP, CHIP 0.01 DM	A.....
CN	701	88-KTA-603-010	1C CONN,15P CAM-B68	A.....
D	719	87-017-932-080	0E ZENER,MTJ6.2B	A.....
D	716	87-017-932-080	0E ZENER,MTJ6.2B	A.....
D	718	87-017-932-080	0E ZENER,MTJ6.2B	A.....
D	720	87-017-932-080	0E ZENER,MTJ6.2B	A.....
		87-A61-225-010	1A JACK,PIN 2P XR-401	A.....
C	903	87-010-494-040	0E CAP,E 1-50 GAS	A.....
C	904	87-010-494-040	0E CAP,E 1-50 GAS	A.....
C	907	87-012-140-080	0E CAP 470P	A.....
C	908	87-012-140-080	0E CAP 470P	A.....
CNA1	401	8A-KT1-631-010	1E CONN ASSY,8P ISO-BLACK-A	A.....
CNA1	402	8A-KT1-632-010	1D CONN ASSY,8P ISO-WHITE-A	A.....
C	1001	87-010-176-080	0E C-CAP,S 680P-50 SL	A.....
C	1002	87-010-194-080	0E CAP, CHIP 0.047	A.....
C	1003	87-010-194-080	0E CAP, CHIP 0.047	A.....
C	1004	87-010-196-080	0E CHIP CAPACITOR,0.1-25	A.....
CN	1001	88-KTA-602-010	1A CONN,15P CAM-B67	A.....
D	1002	87-020-585-080	0E CHIP-ZENER,02CZ6.2Y	A.....
D	1001	87-020-585-080	0E CHIP-ZENER,02CZ6.2Y	A.....
D	1003	87-020-585-080	0E CHIP-ZENER,02CZ6.2Y	A.....
D	1004	87-020-585-080	0E CHIP-ZENER,02CZ6.2Y	A.....
IC	1001	88-KT1-608-010	1H C-IC,LC75854W	A.....
J	1001	87-A61-229-010	1B JACK,3.5 BLK ST W/SW	A.....
LCD1	1001	8A-KTF-610-010	LCD,AKT-10/11/15 (2COLOR)	A.....
LED1	1002	87-017-827-070	0E C-LED,SEC 1201C RED	A.....
LED1	1003	87-017-827-070	0E C-LED,SEC 1201C RED	A.....
LED1	1001	87-017-827-070	0E C-LED,SEC 1201C RED	A.....
LED1	1005	87-A40-813-040	1E C-LED,SEC1E01C BLUE	A.....
LED1	1006	87-A40-813-040	1E C-LED,SEC1E01C BLUE	A.....
LED1	1004	87-A40-813-040	1E C-LED,SEC1E01C BLUE	A.....
PL	1001	8A-KT7-655-010	LAMP,9V-50MA	A.....
PL	1002	8A-KT7-655-010	LAMP,9V-50MA	A.....
Q	1001	87-A30-469-040	C-TR,KRC111S-RTK	A.....
Q	1002	87-A30-472-040	C-TR,KRA226S-RTK	A.....
Q	1004	87-A30-472-040	C-TR,KRA226S-RTK	A.....
Q	1003	87-A30-472-040	C-TR,KRA226S-RTK	A.....
S	1005	87-036-251-080	0E SW,T CT 6X3.5 160	A.....
S	1006	87-036-251-080	0E SW,T CT 6X3.5 160	A.....
S	1001	87-036-251-080	0E SW,T CT 6X3.5 160	A.....
S	1003	87-036-251-080	0E SW,T CT 6X3.5 160	A.....
S	1002	87-036-251-080	0E SW,T CT 6X3.5 160	A.....
S	1009	87-036-251-080	0E SW,T CT 6X3.5 160	A.....
S	1008	87-036-251-080	0E SW,T CT 6X3.5 160	A.....
S	1004	87-A90-001-080	1A C-SW,TACT SKQMAL	A.....
S	1007	87-A90-001-080	1A C-SW,TACT SKQMAL	A.....
S	1014	87-036-251-080	0E SW,T CT 6X3.5 160	A.....
S	1013	87-036-251-080	0E SW,T CT 6X3.5 160	A.....
S	1010	87-036-251-080	0E SW,T CT 6X3.5 160	A.....
S	1015	87-A90-001-080	1A C-SW,TACT SKQMAL	A.....
S	1012	87-A90-001-080	1A C-SW,TACT SKQMAL	A.....
S	1011	87-A90-001-080	1A C-SW,TACT SKQMAL	A.....
VR	1001	87-A91-597-010	1B SW,RTRY SIM-026MT	A.....
W	1001	8A-KT9-611-010	F-CABLE,3P 50MM	A.....
C	709	87-010-178-080	0E CHIP CAP 1000P	.BCD.....
C	703	87-010-196-080	0E CHIP CAPACITOR,0.1-25	.BCD.....
C	707	87-010-196-080	0E CHIP CAPACITOR,0.1-25	.BCD.....
C	708	87-010-197-080	0E CAP, CHIP 0.01 DM	.BCD.....
C	704	87-010-198-080	0E CAP, CHIP 0.022	.BCD.....
C	706	87-010-314-080	0E C-CAP,S 22P-50V	.BCD.....
C	705	87-010-316-080	0E C-CAP,S 33P-50 CH	.BCD.....
C	701	87-010-490-040	0E CAP, ELECT 0.1-50	.BCD.....
C	702	87-010-555-040	0E CAP,E 100-10 GAS	.BCD.....
C	710	87-010-178-080	0E CHIP CAP 1000P	.BCD.....
C	711	87-010-322-080	0E C-CAP,S 100P-50 CH	.BCD.....
C	712	87-016-039-090	1B CAP,DL 0.022F-5.5 Z 70 FM	.BCD.....
C	743	87-016-526-080	0E C-CAP,S 0.47-16 BK	.BCD.....
C	741	87-016-526-080	0E C-CAP,S 0.47-16 BK	.BCD.....
C	742	87-016-526-080	0E C-CAP,S 0.47-16 BK	.BCD.....
C	744	87-016-669-080	0E C-CAP,S 0.1-25 K B	.BCD.....
D	705	87-020-465-080	0E DIODE,1SS133 (110MA)	.BCD.....
D	701	87-020-465-080	0E DIODE,1SS133 (110MA)	.BCD.....
D	702	87-020-465-080	0E DIODE,1SS133 (110MA)	.BCD.....
D	713	87-020-465-080	0E DIODE,1SS133 (110MA)	.BCD.....
D	710	87-020-465-080	0E DIODE,1SS133 (110MA)	.BCD.....

ELECTRICAL MAIN PARTS LIST - 4

D	741	87-A40-830-040	0E	DIODE,KDS226-RTK	.BCD
IC	701	87-A21-530-030	2M	C-IC,UPD178018A-XXX	.BCD
L	701	87-003-149-080	0E	COIL,47UH	.BCD
LED	701	87-027-262-010	0E	LEDE,TLR-124(RED)	.BCD
Q	701	87-A30-470-040		C-TR,KTC3875SY-RTK	.BCD
SW	701	87-A91-070-010	0E	SW,TACT SKHHLV	.BCD
SW	702	87-A91-152-010	1A	SW,SL 1-1-2 SSSS212-11-A	.BCD
X	701	87-A70-175-010	1B	VIB,XTAL 4.5MHZ AT-49	.BCD
C	201	87-010-178-080	0E	CHIP CAP 1000P	.BCD
C	202	87-010-178-080	0E	CHIP CAP 1000P	.BCD
C	209	87-010-494-040	0E	CAP,E 1-50 GAS	.BCD
C	203	87-010-498-040	0E	CAP,E 10-16 GAS	.BCD
C	204	87-010-498-040	0E	CAP,E 10-16 GAS	.BCD
C	205	87-010-555-040	0E	CAP,E 100-10 GAS	.BCD
C	206	87-010-555-040	0E	CAP,E 100-10 GAS	.BCD
C	208	87-012-365-080	0E	C-CAP,S 0.027-25VBK	.BCD
C	207	87-012-365-080	0E	C-CAP,S 0.027-25VBK	.BCD
C	212	87-010-380-080	0E	CAP, ELECT 47-16V	.BCD
C	210	87-010-494-040	0E	CAP,E 1-50 GAS	.BCD
C	214	87-010-494-040	0E	CAP,E 1-50 GAS	.BCD
C	213	87-010-494-040	0E	CAP,E 1-50 GAS	.BCD
C	215	87-010-555-040	0E	CAP,E 100-10 GAS	.BCD
C	211	87-010-555-040	0E	CAP,E 100-10 GAS	.BCD
CN	201	87-009-031-010	0E	CONNECTOR, 3P	.BCD
CN	202	87-099-408-010	0E	CONN,8P EH V WHT	.BCD
CNA	201	8Z-KTA-607-010		CONN ASSY,3P DECK-1	.BCD
CNA	202	8Z-KTG-652-010		CONN ASSY,8P MOTOR	.BCD
IC	201	87-A21-191-010		IC,KIA6225S	.BCD
Q	201	87-A30-295-010		TR,KRA226M	.BCD
Q	203	87-A30-470-040		C-TR,KTC3875SY-RTK	.BCD
Q	204	87-A30-470-040		C-TR,KTC3875SY-RTK	.BCD
Q	202	87-A30-487-080		TR,KRC111M-AT	.BCD
C	102	87-010-178-080	0E	CHIP CAP 1000P	.BCD
C	101	87-010-178-080	0E	CHIP CAP 1000P	.BCD
C	103	87-010-186-080	0E	CAP,CHIP 4700P	.BCD
C	109	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	.BCD
C	108	87-010-197-080	0E	CAP, CHIP 0.01 DM	.BCD
C	106	87-010-198-080	0E	CAP, CHIP 0.022	.BCD
C	104	87-010-490-040	0E	CAP, ELECT 0.1-50	.BCD
C	107	87-010-494-040	0E	CAP,E 1-50 GAS	.BCD
C	105	87-010-498-040	0E	CAP,E 10-16 GAS	.BCD
C	111	87-010-194-080	0E	CAP, CHIP 0.047	.BCD
C	115	87-010-194-080	0E	CAP, CHIP 0.047	.BCD
C	114	87-010-194-080	0E	CAP, CHIP 0.047	.BCD
C	117	87-010-197-080	0E	CAP, CHIP 0.01 DM	.BCD
C	116	87-010-197-080	0E	CAP, CHIP 0.01 DM	.BCD
C	113	87-010-198-080	0E	CAP, CHIP 0.022	.BCD
C	112	87-010-198-080	0E	CAP, CHIP 0.022	.BCD
C	112	87-010-213-080	0E	C-CAP,S 0.015-50 B	.BCD
C	113	87-010-213-080	0E	C-CAP,S 0.015-50 B	.BCD
C	110	87-010-553-040	0E	CAP,E 47-16 GAS	.BCD
C	120	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	.BCD
C	121	87-010-197-080	0E	CAP, CHIP 0.01 DM	.BCD
D	102	87-020-465-080	0E	DIODE,1SS133 (110MA)	.BCD
D	101	87-020-465-080	0E	DIODE,1SS133 (110MA)	.BCD
J	101	8Z-KT1-614-010	1A	ANT,AW-002	.BCD
L	101	87-003-143-080	0E	COIL 4.7 UH	.BCD
L	102	8Z-KT1-619-010	1A	COIL,68MH K7-D	.BCD
Q	109	87-A30-295-010		TR,KRA226M	.BCD
Q	101	87-A30-469-040		C-TR,KRC111S-RTK	.BCD
Q	106	87-A30-469-040		C-TR,KRC111S-RTK	.BCD
Q	105	87-A30-470-040		C-TR,KTC3875SY-RTK	.BCD
Q	107	87-A30-470-040		C-TR,KTC3875SY-RTK	.BCD
Q	108	87-A30-470-040		C-TR,KTC3875SY-RTK	.BCD
Q	103	87-A30-470-040		C-TR,KTC3875SY-RTK	.BCD
Q	102	87-A30-470-040		C-TR,KTC3875SY-RTK	.BCD
Q	104	87-A30-471-040		C-TR,KTA1504SY-RTK	.BCD
Q	110	87-A30-473-080		TR,KRC102M-AT	.BCD
TU	101	8A-KC8-620-010	2B	TU UNIT, FAE347-A11	.BCD
C	1103	87-010-175-080	0E	CAP 560P	.BCD
C	1104	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	.BCD
C	1107	87-010-197-080	0E	CAP, CHIP 0.01 DM	.BCD
C	1102	87-010-315-080	0E	C-CAP,S 27P-50 CH	.BCD
C	1106	87-010-495-040	0E	CAP,E 2.2-50 GAS	.BCD
C	1101	87-012-149-080	0E	C-CAP,S 30P-50 CH	.BCD
C	1105	87-012-157-080	0E	C-CAP,S 330P-50 CH	.BCD
IC	1101	88-KT1-607-080	1H	C-IC,SAA6579T	.BCD
Q	1101	87-A30-469-040		C-TR,KRC111S-RTK	.BCD
X	1101	87-A70-091-010	1B	VIB,XTAL 4.332MHZ CSA-309	.BCD
C	506	87-010-184-080	0E	CHIP CAPACITOR 3300P(K)	.BCD
C	505	87-010-184-080	0E	CHIP CAPACITOR 3300P(K)	.BCD
C	507	87-010-198-080	0E	CAP, CHIP 0.022	.BCD
C	508	87-010-198-080	0E	CAP, CHIP 0.022	.BCD
C	501	87-010-494-040	0E	CAP,E 1-50 GAS	.BCD
C	504	87-010-494-040	0E	CAP,E 1-50 GAS	.BCD
C	503	87-010-494-040	0E	CAP,E 1-50 GAS	.BCD
C	502	87-010-494-040	0E	CAP,E 1-50 GAS	.BCD
C	509	87-010-498-040	0E	CAP,E 10-16 GAS	.BCD
C	519	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	.BCD
C	516	87-010-498-040	0E	CAP,E 10-16 GAS	.BCD
C	518	87-010-498-040	0E	CAP,E 10-16 GAS	.BCD
C	515	87-010-498-040	0E	CAP,E 10-16 GAS	.BCD
C	510	87-010-498-040	0E	CAP,E 10-16 GAS	.BCD

ELECTRICAL MAIN PARTS LIST - 5

C	517	87-010-553-040	OE	CAP,E 47-16 GAS	.BCD
C	514	87-016-083-080	OE	C-CAP,S 0.15-16 RK	.BCD
C	512	87-016-083-080	OE	C-CAP,S 0.15-16 RK	.BCD
C	511	87-016-083-080	OE	C-CAP,S 0.15-16 RK	.BCD
C	513	87-016-083-080	OE	C-CAP,S 0.15-16 RK	.BCD
C	527	87-010-178-080	OE	CHIP CAP 1000P	.BCD
C	521	87-010-494-040	OE	CAP,E 1-50 GAS	.BCD
C	520	87-010-494-040	OE	CAP,E 1-50 GAS	.BCD
C	522	87-010-494-040	OE	CAP,E 1-50 GAS	.BCD
C	523	87-010-494-040	OE	CAP,E 1-50 GAS	.BCD
C	524	87-010-553-040	OE	CAP,E 47-16 GAS	.BCD
C	526	87-012-141-080	OE	CHIP-CAPACITOR,0.22-16F	.BCD
C	525	87-012-141-080	OE	CHIP-CAPACITOR,0.22-16F	.BCD
D	501	87-020-465-080	OE	DIODE,1SS133 (110MA)	.BCD
IC	501	8Z-KT1-622-010	2A	C-IC,LC75374E	.BCD
Q	8	87-A30-469-040		C-TR,KRC111S-RTK	.BCD
Q	502	87-026-576-080	OE	C-TR,DTC343TK	.BCD
Q	503	87-026-576-080	OE	C-TR,DTC343TK	.BCD
Q	504	87-026-576-080	OE	C-TR,DTC343TK	.BCD
Q	501	87-026-576-080	OE	C-TR,DTC343TK	.BCD
Q	505	87-A30-467-040		C-TR,KRA111S-RTK	.BCD
Q	506	87-A30-468-040	OE	C-TR,KRC102S-RTK	.BCD
Q	5075	87-A30-469-040		C-TR,KRC111S-RTK	.BCD
C	608	87-010-180-080	OE	C-CER 1500P	.BCD
C	607	87-010-180-080	OE	C-CER 1500P	.BCD
C	605	87-010-180-080	OE	C-CER 1500P	.BCD
C	606	87-010-180-080	OE	C-CER 1500P	.BCD
C	609	87-010-498-040	OE	CAP,E 10-16 GAS	.BCD
C	601	87-016-083-080	OE	C-CAP,S 0.15-16 RK	.BCD
C	602	87-016-083-080	OE	C-CAP,S 0.15-16 RK	.BCD
C	603	87-016-083-080	OE	C-CAP,S 0.15-16 RK	.BCD
C	604	87-016-083-080	OE	C-CAP,S 0.15-16 RK	.BCD
C	611	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	.BCD
C	613	87-010-490-040	OE	CAP, ELECT 0.1-50	.BCD
C	612	87-010-552-040	OE	CAP,E 22-16 GAS	.BCD
C	610	8Z-KT1-633-090	1B	CAP,E 3300U-16 PW	.BCD
D	605	87-001-783-080	OE	DIODE,1N4002	.BCD
D	606	87-001-783-080	OE	DIODE,1N4002	.BCD
D	604	87-001-783-080	OE	DIODE,1N4002	.BCD
D	601	87-001-783-080	OE	DIODE,1N4002	.BCD
D	607	87-001-783-080	OE	DIODE,1N4002	.BCD
D	603	87-001-783-080	OE	DIODE,1N4002	.BCD
D	602	87-001-783-080	OE	DIODE,1N4002	.BCD
D	608	87-001-783-080	OE	DIODE,1N4002	.BCD
IC	601	8Z-KTG-622-010	2A	IC,TA8259H	.BCD
C	802	87-010-182-080	OE	C-CAP,S 2200P-50 B	.BCD
C	804	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	.BCD
C	801	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	.BCD
C	808	87-010-198-080	OE	CAP, CHIP 0.022	.BCD
C	807	87-010-498-040	OE	CAP,E 10-16 GAS	.BCD
C	806	87-010-498-040	OE	CAP,E 10-16 GAS	.BCD
C	805	87-010-555-040	OE	CAP,E 100-10 GAS	.BCD
C	810	87-010-198-080	OE	CAP, CHIP 0.022	.BCD
C	812	87-010-498-040	OE	CAP,E 10-16 GAS	.BCD
C	811	87-010-553-040	OE	CAP,E 47-16 GAS	.BCD
D	802	87-001-783-080	OE	DIODE,1N4002	.BCD
D	804	87-017-931-080	OE	ZENER,MTZJ5.6B	.BCD
D	808	87-017-931-080	OE	ZENER,MTZJ5.6B	.BCD
D	801	87-070-022-010	OE	DIODE,IN5402 (RECT)	.BCD
D	803	87-070-334-080	OE	ZENER,MTZJ10B	.BCD
D	805	87-A40-337-080	OE	ZENER,MTZJ 6.8B	.BCD
D	807	87-A40-509-080	OE	ZENER,MTZJ6.8C	.BCD
D	806	87-A40-523-080	OE	ZENER,MTZJ9.1B	.BCD
D	809	87-A40-620-080	OE	ZENER,MTZJ6.2A	.BCD
D	811	87-020-465-080	OE	DIODE,1SS133 (110MA)	.BCD
D	812	87-070-136-080	OE	ZENER,MTZJ5.1B	.BCD
D	813	87-A40-509-080	OE	ZENER,MTZJ6.8C	.BCD
D	814	87-A40-509-080	OE	ZENER,MTZJ6.8C	.BCD
F	801	8Z-KC1-621-010	1B	FUSE,15A 32V	.BCD
L	801	8Z-KT1-615-010	1C	FLTR,AMORPHOUS -CHOKE	.BCD
Q	804	87-A30-473-080		TR,KRC102M-AT	.BCD
Q	806	87-A30-473-080		TR,KRC102M-AT	.BCD
Q	803	87-A30-473-080		TR,KRC102M-AT	.BCD
Q	805	87-A30-475-080		TR,KRA104M-AT	.BCD
Q	802	87-A30-476-010		TR,KTA1046Y	.BCD
Q	808	89-423-953-010	1A	TR,2SD2395F	.BCD
Q	807	89-423-953-010	1A	TR,2SD2395F	.BCD
Q	809	8Z-KTH-626-080		TR,KTC3203Y	.BCD
Q	801	8Z-KTH-627-080		TR,KTA1273Y	.BCD
Q	815	87-A30-467-040		C-TR,KRA111S-RTK	.BCD
Q	811	87-A30-473-080		TR,KRC102M-AT	.BCD
Q	812	87-A30-473-080		TR,KRC102M-AT	.BCD
Q	813	8Z-KTH-623-080		TR,KTA1267Y	.BCD
Q	814	8Z-KTH-626-080		TR,KTC3203Y	.BCD
Q	810	8Z-KTH-626-080		TR,KTC3203Y	.BCD
C	303	87-010-178-080	OE	CHIP CAP 1000P	.BCD
C	304	87-010-178-080	OE	CHIP CAP 1000P	.BCD
C	302	87-010-401-080	OE	CAP, ELECT 1-50V	.BCD
C	301	87-010-401-080	OE	CAP, ELECT 1-50V	.BCD
C	713	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	.BCD
C	714	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	.BCD
CN	701	88-KTA-603-010	1C	CONN,15P CAM-B68	.BCD
D	716	87-017-932-080	OE	ZENER,MTJ6.2B	.BCD

ELECTRICAL MAIN PARTS LIST - 6

D	718	87-017-932-080	0E	ZENER,MTJ6.2B	.BCD
D	719	87-017-932-080	0E	ZENER,MTJ6.2B	.BCD
D	720	87-017-932-080	0E	ZENER,MTJ6.2B	.BCD
L	301	87-003-143-080	0E	COIL 4.7 UH	.BCD
C	904	87-010-494-040	0E	CAP,E 1-50 GAS	.BCD
C	903	87-010-494-040	0E	CAP,E 1-50 GAS	.BCD
C	908	87-012-140-080	0E	CAP 470P	.BCD
C	907	87-012-140-080	0E	CAP 470P	.BCD
CN	802	8A-KT1-631-010	1E	CONN ASSY,8P ISO-BLACK-A	.BCD
CN	801	8A-KT1-632-010	1D	CONN ASSY,8P ISO-WHITE-A	.BCD
J	901	87-A61-225-010	1A	JACK,PIN 2P XR-401	.BCD
C	1001	87-010-176-080	0E	C-CAP,S 680P-50 SL	.BCD
C	1002	87-010-194-080	0E	CAP, CHIP 0.047	.BCD
C	1003	87-010-194-080	0E	CAP, CHIP 0.047	.BCD
C	1004	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	.BCD
CN	1001	88-KTA-602-010	1A	CONN,15P CAM-B67	.BCD
D	1002	87-020-585-080	0E	CHIP-ZENER,02CZ6.2Y	.BCD
D	1001	87-020-585-080	0E	CHIP-ZENER,02CZ6.2Y	.BCD
D	1003	87-020-585-080	0E	CHIP-ZENER,02CZ6.2Y	.BCD
D	1004	87-020-585-080	0E	CHIP-ZENER,02CZ6.2Y	.BCD
IC	1001	88-KT1-608-010	1H	C-IC,LC75854W	.BCD
J	1001	87-A61-229-010	1B	JACK,3.5 BLK ST W/SW	.BCD
LCD1001		8A-KTB-610-010		LCD,AKT-11(NO COLOR)	.B.D
LCD1001		8A-KTF-610-010		LCD,AKT-10/11/15 (2COLOR)	.C
LED1003		87-017-827-070	0E	C-LED,SEC 1201C RED	.BCD
LED1002		87-017-827-070	0E	C-LED,SEC 1201C RED	.BCD
LED1001		87-017-827-070	0E	C-LED,SEC 1201C RED	.BCD
LED1006		87-A40-813-040	1E	C-LED,SEC1E01C BLUE	.BCD
LED1004		87-A40-813-040	1E	C-LED,SEC1E01C BLUE	.BCD
LED1005		87-A40-813-040	1E	C-LED,SEC1E01C BLUE	.BCD
LED1007		87-A40-814-080	1C	LED,SEL2E10C BLUE	.D
LED1008		87-A40-814-080	1C	LED,SEL2E10C BLUE	.D
PL	1002	8A-KT7-655-010		LAMP,9V-50MA	.BC
PL	1001	8A-KT7-655-010		LAMP,9V-50MA	.BC
Q	1001	87-A30-469-040		C-TR,KRC111S-RTK	.BCD
Q	1002	87-A30-472-040		C-TR,KRA226S-RTK	.BCD
Q	1004	87-A30-472-040		C-TR,KRA226S-RTK	.BCD
Q	1003	87-A30-472-040		C-TR,KRA226S-RTK	.BCD
S	1005	87-036-251-080	0E	SW,T CT 6X3.5 160	.BCD
S	1009	87-036-251-080	0E	SW,T CT 6X3.5 160	.BCD
S	1002	87-036-251-080	0E	SW,T CT 6X3.5 160	.BCD
S	1008	87-036-251-080	0E	SW,T CT 6X3.5 160	.BCD
S	1003	87-036-251-080	0E	SW,T CT 6X3.5 160	.BCD
S	1006	87-036-251-080	0E	SW,T CT 6X3.5 160	.BCD
S	1001	87-036-251-080	0E	SW,T CT 6X3.5 160	.BCD
S	1007	87-A90-001-080	1A	C-SW,TACT SKQMAL	.BCD
S	1004	87-A90-001-080	1A	C-SW,TACT SKQMAL	.BCD
S	1014	87-036-251-080	0E	SW,T CT 6X3.5 160	.BCD
S	1010	87-036-251-080	0E	SW,T CT 6X3.5 160	.BCD
S	1013	87-036-251-080	0E	SW,T CT 6X3.5 160	.BCD
S	1011	87-A90-001-080	1A	C-SW,TACT SKQMAL	.BCD
S	1012	87-A90-001-080	1A	C-SW,TACT SKQMAL	.BCD
S	1015	87-A90-001-080	1A	C-SW,TACT SKQMAL	.BCD
VR	1001	87-A91-597-010	1B	SW,RTRY SIM-026MT	.BCD
W	1001	8A-KT9-611-010		F-CABLE,3P 50MM	.BCD
C	709	87-010-178-080	0E	CHIP CAP 1000P	.EFGH
C	703	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	.EFGH
C	707	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	.EFGH
C	708	87-010-197-080	0E	CAP, CHIP 0.01 DM	.EFGH
C	704	87-010-198-080	0E	CAP, CHIP 0.022	.EFGH
C	706	87-010-314-080	0E	C-CAP,S 22P-50V	.EFGH
C	705	87-010-315-080	0E	C-CAP,S 27P-50 CH	.EFGH
C	701	87-010-490-040	0E	CAP, ELECT 0.1-50	.EFGH
C	702	87-010-555-040	0E	CAP,E 100-10 GAS	.EFGH
C	710	87-010-178-080	0E	CHIP CAP 1000P	.EFGH
C	711	87-010-322-080	0E	C-CAP,S 100P-50 CH	.EFGH
C	742	87-016-526-080	0E	C-CAP,S 0.47-16 BK	.EFGH
C	741	87-016-526-080	0E	C-CAP,S 0.47-16 BK	.EFGH
C	743	87-016-526-080	0E	C-CAP,S 0.47-16 BK	.EFGH
C	744	87-016-669-080	0E	C-CAP,S 0.1-25 K B	.EFGH
D	701	87-020-465-080	0E	DIODE,1SS133 (110MA)	.EFGH
D	705	87-020-465-080	0E	DIODE,1SS133 (110MA)	.EFGH
D	707	87-020-465-080	0E	DIODE,1SS133 (110MA)	.EFGH
D	702	87-020-465-080	0E	DIODE,1SS133 (110MA)	.EFGH
D	741	87-A40-830-040	0E	DIODE,KDS226-RTK	.EFGH
IC	701	87-A21-531-030	2M	C-IC,UPD178006A-XXX	.EFGH
L	701	87-003-149-080	0E	COIL,47UH	.EFGH
LED	701	87-027-262-010	0E	LEDE,TLR-124 (RED)	.EFGH
Q	701	87-A30-470-040		C-TR,KTC3875SY-RTK	.EFGH
SW	701	87-A91-070-010	0E	SW,TACT SKHHLV	.EFGH
SW	702	87-A91-152-010	1A	SW,SL 1-1-2 SSSS212-11-A	.EFGH
X	701	87-A70-175-010	1B	VIB,XTAL 4.5MHZ AT-49	.EFGH
C	202	87-010-178-080	0E	CHIP CAP 1000P	.EFGH
C	201	87-010-178-080	0E	CHIP CAP 1000P	.EFGH
C	207	87-010-198-080	0E	CAP, CHIP 0.022	.EFGH
C	208	87-010-198-080	0E	CAP, CHIP 0.022	.EFGH
C	209	87-010-494-040	0E	CAP,E 1-50 GAS	.EFGH
C	204	87-010-498-040	0E	CAP,E 10-16 GAS	.EFGH
C	203	87-010-498-040	0E	CAP,E 10-16 GAS	.EFGH
C	205	87-010-555-040	0E	CAP,E 100-10 GAS	.EFGH
C	206	87-010-555-040	0E	CAP,E 100-10 GAS	.EFGH
C	212	87-010-380-080	0E	CAP, ELECT 47-16V	.EFGH
C	214	87-010-494-040	0E	CAP,E 1-50 GAS	.EFGH

ELECTRICAL MAIN PARTS LIST - 7

C	210	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
C	213	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
C	211	87-010-555-040	OE	CAP,E 100-10 GAS	EFGH
C	215	87-010-555-040	OE	CAP,E 100-10 GAS	EFGH
CN	201	87-009-031-010	OE	CONNECTOR, 3P	EFGH
CN	202	87-099-408-010	OE	CONN,8P EH V WHT	EFGH
CNA	201	8Z-KTA-607-010		CONN ASSY,3P DECK-1	EFGH
CNA	202	8Z-KTG-652-010		CONN ASSY,8P MOTOR	EFGH
IC	201	87-A21-191-010		IC,KIA6225S	EFGH
Q	201	87-A30-295-010		TR,KRA226M	EFGH
Q	203	87-A30-470-040		C-TR,KTC3875SY-RTK	EFGH
Q	204	87-A30-470-040		C-TR,KTC3875SY-RTK	EFGH
Q	202	87-A30-487-080		TR,KRC111M-AT	EFGH
C	401	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
C	402	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
D	401	87-017-932-080	OE	ZENER,MTJ6.2B	EFGH
D	404	87-017-932-080	OE	ZENER,MTJ6.2B	EFGH
D	403	87-017-932-080	OE	ZENER,MTJ6.2B	EFGH
D	406	87-017-932-080	OE	ZENER,MTJ6.2B	EFGH
D	405	87-017-932-080	OE	ZENER,MTJ6.2B	EFGH
D	402	87-017-932-080	OE	ZENER,MTJ6.2B	EFGH
J	401	8A-KC7-620-010	1B	JACK,DIN 13 P SKDS1302	EFGH
Q	401	87-A30-295-010		TR,KRA226M	EFGH
Q	402	87-A30-473-080		TR,KRC102M-AT	EFGH
C	102	87-010-178-080	OE	CHIP CAP 1000P	EFGH
C	101	87-010-178-080	OE	CHIP CAP 1000P	EFGH
C	103	87-010-186-080	OE	CAP,CHIP 4700P	EFGH
C	109	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	EFGH
C	108	87-010-197-080	OE	CAP, CHIP 0.01 DM	EFGH
C	106	87-010-198-080	OE	CAP, CHIP 0.022	EFGH
C	104	87-010-490-040	OE	CAP, ELECT 0.1-50	EFGH
C	107	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
C	105	87-010-553-040	OE	CAP,E 47-16 GAS	EFGH
C	118	87-010-178-080	OE	CHIP CAP 1000P	EFGH
C	111	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	EFGH
C	117	87-010-197-080	OE	CAP, CHIP 0.01 DM	EFGH
C	116	87-010-197-080	OE	CAP, CHIP 0.01 DM	EFGH
C	112	87-010-198-080	OE	CAP, CHIP 0.022	EFGH
C	113	87-010-198-080	OE	CAP, CHIP 0.022	EFGH
C	115	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
C	114	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
C	119	87-010-553-040	OE	CAP,E 47-16 GAS	EFGH
C	110	87-010-553-040	OE	CAP,E 47-16 GAS	EFGH
C	120	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	EFGH
C	121	87-010-197-080	OE	CAP, CHIP 0.01 DM	EFGH
D	101	87-020-465-080	OE	DIODE,1SS133 (110MA)	EFGH
D	102	87-020-465-080	OE	DIODE,1SS133 (110MA)	EFGH
J	101	8Z-KT1-614-010	1A	ANT,AW-002	EFGH
L	101	87-003-143-080	OE	COIL 4.7 UH	EFGH
L	102	8Z-KT1-619-010	1A	COIL,68MH K7-D	EFGH
Q	109	87-A30-295-010		TR,KRA226M	EFGH
Q	106	87-A30-467-040		C-TR,KRA111S-RTK	EFGH
Q	101	87-A30-467-040		C-TR,KRA111S-RTK	EFGH
Q	102	87-A30-470-040		C-TR,KTC3875SY-RTK	EFGH
Q	103	87-A30-470-040		C-TR,KTC3875SY-RTK	EFGH
Q	108	87-A30-470-040		C-TR,KTC3875SY-RTK	EFGH
Q	105	87-A30-470-040		C-TR,KTC3875SY-RTK	EFGH
Q	107	87-A30-470-040		C-TR,KTC3875SY-RTK	EFGH
Q	104	87-A30-471-040		C-TR,KTA1504SY-RTK	EFGH
Q	110	87-A30-473-080		TR,KRC102M-AT	EFGH
TU	101	8A-KC8-620-010	2B	TU UNIT, FAE347-A11	F
TU	101	8A-KC8-621-010	2B	TU UNIT, FAE347-A12	E.GH
C	506	87-010-184-080	OE	CHIP CAPACITOR 3300P(K)	EFGH
C	505	87-010-184-080	OE	CHIP CAPACITOR 3300P(K)	EFGH
C	507	87-010-198-080	OE	CAP, CHIP 0.022	EFGH
C	508	87-010-198-080	OE	CAP, CHIP 0.022	EFGH
C	503	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
C	501	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
C	502	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
C	504	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
C	509	87-010-498-040	OE	CAP,E 10-16 GAS	EFGH
C	519	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	EFGH
C	516	87-010-498-040	OE	CAP,E 10-16 GAS	EFGH
C	518	87-010-498-040	OE	CAP,E 10-16 GAS	EFGH
C	510	87-010-498-040	OE	CAP,E 10-16 GAS	EFGH
C	515	87-010-498-040	OE	CAP,E 10-16 GAS	EFGH
C	517	87-010-553-040	OE	CAP,E 47-16 GAS	EFGH
C	514	87-016-083-080	OE	C-CAP,S 0.15-16 RK	EFGH
C	511	87-016-083-080	OE	C-CAP,S 0.15-16 RK	EFGH
C	513	87-016-083-080	OE	C-CAP,S 0.15-16 RK	EFGH
C	512	87-016-083-080	OE	C-CAP,S 0.15-16 RK	EFGH
C	527	87-010-184-080	OE	CHIP CAPACITOR 3300P(K)	EFGH
C	525	87-010-491-040	OE	CAP,E 0.22-50 GAS	EFGH
C	526	87-010-491-040	OE	CAP,E 0.22-50 GAS	EFGH
C	521	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
C	523	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
C	520	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
C	522	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
C	524	87-010-553-040	OE	CAP,E 47-16 GAS	EFGH
D	501	87-020-465-080	OE	DIODE,1SS133 (110MA)	EFGH
IC	501	8Z-KT1-622-010	2A	C-IC,LC75374E	EFGH
Q	501	87-026-576-080	OE	C-TR,DTC343TK	EFGH
Q	504	87-026-576-080	OE	C-TR,DTC343TK	EFGH


ELECTRICAL MAIN PARTS LIST - 8

Q	502	87-026-576-080	OE	C-TR,DTC343TK	EFGH
Q	503	87-026-576-080	OE	C-TR,DTC343TK	EFGH
Q	507	87-A30-467-040		C-TR,KRA111S-RTK	EFGH
Q	508	87-A30-467-040		C-TR,KRA111S-RTK	EFGH
Q	506	87-A30-467-040		C-TR,KRA111S-RTK	EFGH
Q	505	87-A30-484-040	OE	C-TR,KRA102S	EFGH
Q	607	87-010-180-080	OE	C-CER 1500P	EFGH
C	608	87-010-180-080	OE	C-CER 1500P	EFGH
C	606	87-010-180-080	OE	C-CER 1500P	EFGH
C	605	87-010-180-080	OE	C-CER 1500P	EFGH
C	609	87-010-498-040	OE	CAP,E 10-16 GAS	EFGH
C	602	87-016-083-080	OE	C-CAP,S 0.15-16 RK	EFGH
C	603	87-016-083-080	OE	C-CAP,S 0.15-16 RK	EFGH
C	604	87-016-083-080	OE	C-CAP,S 0.15-16 RK	EFGH
C	601	87-016-083-080	OE	C-CAP,S 0.15-16 RK	EFGH
C	611	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	EFGH
C	613	87-010-490-040	OE	CAP, ELECT 0.1-50	EFGH
C	612	87-010-552-040	OE	CAP,E 22-16 GAS	EFGH
C	610	8Z-KT1-633-090	1B	CAP,E 3300U-16 PW	EFGH
D	601	87-001-783-080	OE	DIODE,1N4002	EFGH
D	607	87-001-783-080	OE	DIODE,1N4002	EFGH
D	604	87-001-783-080	OE	DIODE,1N4002	EFGH
D	605	87-001-783-080	OE	DIODE,1N4002	EFGH
D	608	87-001-783-080	OE	DIODE,1N4002	EFGH
D	603	87-001-783-080	OE	DIODE,1N4002	EFGH
D	606	87-001-783-080	OE	DIODE,1N4002	EFGH
D	602	87-001-783-080	OE	DIODE,1N4002	EFGH
IC	601	8Z-KTG-622-010	2A	IC,TA8259H	EFGH
C	802	87-010-182-080	OE	C-CAP,S 2200P-50 B	EFGH
C	804	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	EFGH
C	801	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	EFGH
C	808	87-010-198-080	OE	CAP, CHIP 0.022	EFGH
C	807	87-010-498-040	OE	CAP,E 10-16 GAS	EFGH
C	806	87-010-498-040	OE	CAP,E 10-16 GAS	EFGH
C	805	87-010-498-040	OE	CAP,E 10-16 GAS	EFGH
C	811	87-010-553-040	OE	CAP,E 47-16 GAS	EFGH
CN	801	8A-KT1-631-010	1E	CONN ASSY,8P ISO-BLACK-A	F
CN	801	8Z-KT1-624-010		CONN,16P SOC017	E.GH
CNA	801	8A-KT1-632-010	1D	CONN ASSY,8P ISO-WHITE-A	F
D	802	87-001-783-080	OE	DIODE,1N4002	EFGH
D	804	87-017-931-080	OE	ZENER,MTZJ5.6B	EFGH
D	808	87-017-932-080	OE	ZENER,MTJ6.2B	F.GH
D	801	87-070-022-010	OE	DIODE,IN5402 (RECT)	EFGH
D	803	87-070-334-080	OE	ZENER,MTZJ10B	EFGH
D	805	87-A40-337-080	OE	ZENER,MTZJ 6.8B	EFGH
D	807	87-A40-509-080	OE	ZENER,MTZJ6.8C	EFGH
D	806	87-A40-523-080	OE	ZENER,MTZJ9.1B	EFGH
D	809	87-A40-650-080	OE	ZENER,MTZJ6.8A	F.GH
D	810	87-017-931-080	OE	ZENER,MTZJ5.6B	EFGH
F	801	8Z-KC1-621-010	1B	FUSE,15A 32V	EFGH
L	801	8Z-KT1-615-010	1C	FLTR,AMORPHOUS -CHOKE	EFGH
Q	806	87-A30-473-080		TR,KRC102M-AT	EFGH
Q	804	87-A30-473-080		TR,KRC102M-AT	EFGH
Q	803	87-A30-473-080		TR,KRC102M-AT	EFGH
Q	805	87-A30-475-080		TR,KRA104M-AT	EFGH
Q	802	87-A30-476-010		TR,KTA1046Y	EFGH
Q	808	89-423-953-010	1A	TR,2SD2395F	EFGH
Q	807	89-423-953-010	1A	TR,2SD2395F	EFGH
Q	809	8Z-KTH-626-080		TR,KTC3203Y	EFGH
Q	801	8Z-KTH-627-080		TR,KTA1273Y	EFGH
Q	810	8Z-KTH-626-080		TR,KTC3203Y	EFGH
Q	814	8Z-KTH-626-080		TR,KTC3203Y	EFGH
C	303	87-010-178-080	OE	CHIP CAP 1000P	EFGH
C	304	87-010-178-080	OE	CHIP CAP 1000P	EFGH
C	302	87-010-401-080	OE	CAP, ELECT 1-50V	EFGH
C	301	87-010-401-080	OE	CAP, ELECT 1-50V	EFGH
C	713	87-010-197-080	OE	CAP, CHIP 0.01 DM	EFGH
C	714	87-010-197-080	OE	CAP, CHIP 0.01 DM	EFGH
CN	701	88-KTA-603-010	1C	CONN,15P CAM-B68	EFGH
D	716	87-017-932-080	OE	ZENER,MTJ6.2B	EFGH
D	718	87-017-932-080	OE	ZENER,MTJ6.2B	EFGH
D	719	87-017-932-080	OE	ZENER,MTJ6.2B	EFGH
D	720	87-017-932-080	OE	ZENER,MTJ6.2B	EFGH
C	903	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
C	904	87-010-494-040	OE	CAP,E 1-50 GAS	EFGH
C	908	87-012-140-080	OE	CAP 470P	EFGH
C	907	87-012-140-080	OE	CAP 470P	EFGH
J	901	87-A61-224-010	1A	JACK,PIN 4P XR-401	GH
J	901	87-A61-225-010	1A	JACK,PIN 2P XR-401	EF
C	1001	87-010-176-080	OE	C-CAP,S 680P-50 SL	EFGH
C	1002	87-010-194-080	OE	CAP, CHIP 0.047	EFGH
C	1003	87-010-194-080	OE	CAP, CHIP 0.047	EFGH
C	1004	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	EFGH
CN	1001	88-KTA-602-010	1A	CONN,15P CAM-B67	EFGH
D	1003	87-020-585-080	OE	CHIP-ZENER,02CZ6.2Y	EFGH
D	1002	87-020-585-080	OE	CHIP-ZENER,02CZ6.2Y	EFGH
D	1001	87-020-585-080	OE	CHIP-ZENER,02CZ6.2Y	EFGH
D	1004	87-020-585-080	OE	CHIP-ZENER,02CZ6.2Y	EFGH
IC	1001	88-KT1-608-010	1H	C-IC,LC75854W	EFGH
J	1001	87-A61-229-010	1B	JACK,3.5 BLK ST W/SW	EFGH
LCD1001		8A-KTF-610-010		LCD,AKT-10/11/15 (2COLOR)	F.GH
LCD1001		8A-KTF-611-010		LCD,AKT-15(1 COLOR)	E
LED1002		87-017-827-070	OE	C-LED,SEC 1201C RED	EFGH


ELECTRICAL MAIN PARTS LIST - 9

LED1003	87-017-827-070	0E	C-LED,SEC 1201C REDEFGH.....
LED1001	87-017-827-070	0E	C-LED,SEC 1201C REDEFGH.....
LED1005	87-A40-813-040	1E	C-LED,SEC1E01C BLUEEFGH.....
LED1006	87-A40-813-040	1E	C-LED,SEC1E01C BLUEEFGH.....
LED1004	87-A40-813-040	1E	C-LED,SEC1E01C BLUEEFGH.....
PL 1002	8A-KT7-655-010		LAMP,9V-50MAEFGH.....
PL 1001	8A-KT7-655-010		LAMP,9V-50MAEFGH.....
Q 1001	87-A30-469-040		C-TR,KRC111S-RTKEFGH.....
Q 1003	87-A30-472-040		C-TR,KRA226S-RTKEFGH.....
Q 1004	87-A30-472-040		C-TR,KRA226S-RTKEFGH.....
Q 1002	87-A30-472-040		C-TR,KRA226S-RTKEFGH.....
S 1005	87-036-251-080	0E	SW,T CT 6X3.5 160EFGH.....
S 1003	87-036-251-080	0E	SW,T CT 6X3.5 160EFGH.....
S 1002	87-036-251-080	0E	SW,T CT 6X3.5 160EFGH.....
S 1006	87-036-251-080	0E	SW,T CT 6X3.5 160EFGH.....
S 1008	87-036-251-080	0E	SW,T CT 6X3.5 160EFGH.....
S 1009	87-036-251-080	0E	SW,T CT 6X3.5 160EFGH.....
S 1001	87-036-251-080	0E	SW,T CT 6X3.5 160EFGH.....
S 1004	87-A90-001-080	1A	C-SW,TACT SKQMALEFGH.....
S 1007	87-A90-001-080	1A	C-SW,TACT SKQMALEFGH.....
S 1013	87-036-251-080	0E	SW,T CT 6X3.5 160EFGH.....
S 1014	87-036-251-080	0E	SW,T CT 6X3.5 160EFGH.....
S 1010	87-036-251-080	0E	SW,T CT 6X3.5 160EFGH.....
S 1015	87-A90-001-080	1A	C-SW,TACT SKQMALEFGH.....
S 1012	87-A90-001-080	1A	C-SW,TACT SKQMALEFGH.....
S 1011	87-A90-001-080	1A	C-SW,TACT SKQMALEFGH.....
VR 1001	87-A91-597-010	1B	SW,RTRY SIM-026MTEFGH.....
W 1001	8A-KT9-611-010		F-CABLE,3P 50MMEFGH.....


SCHEMATIC DIAGRAM-1 <R430M/R410/R420/RV425>

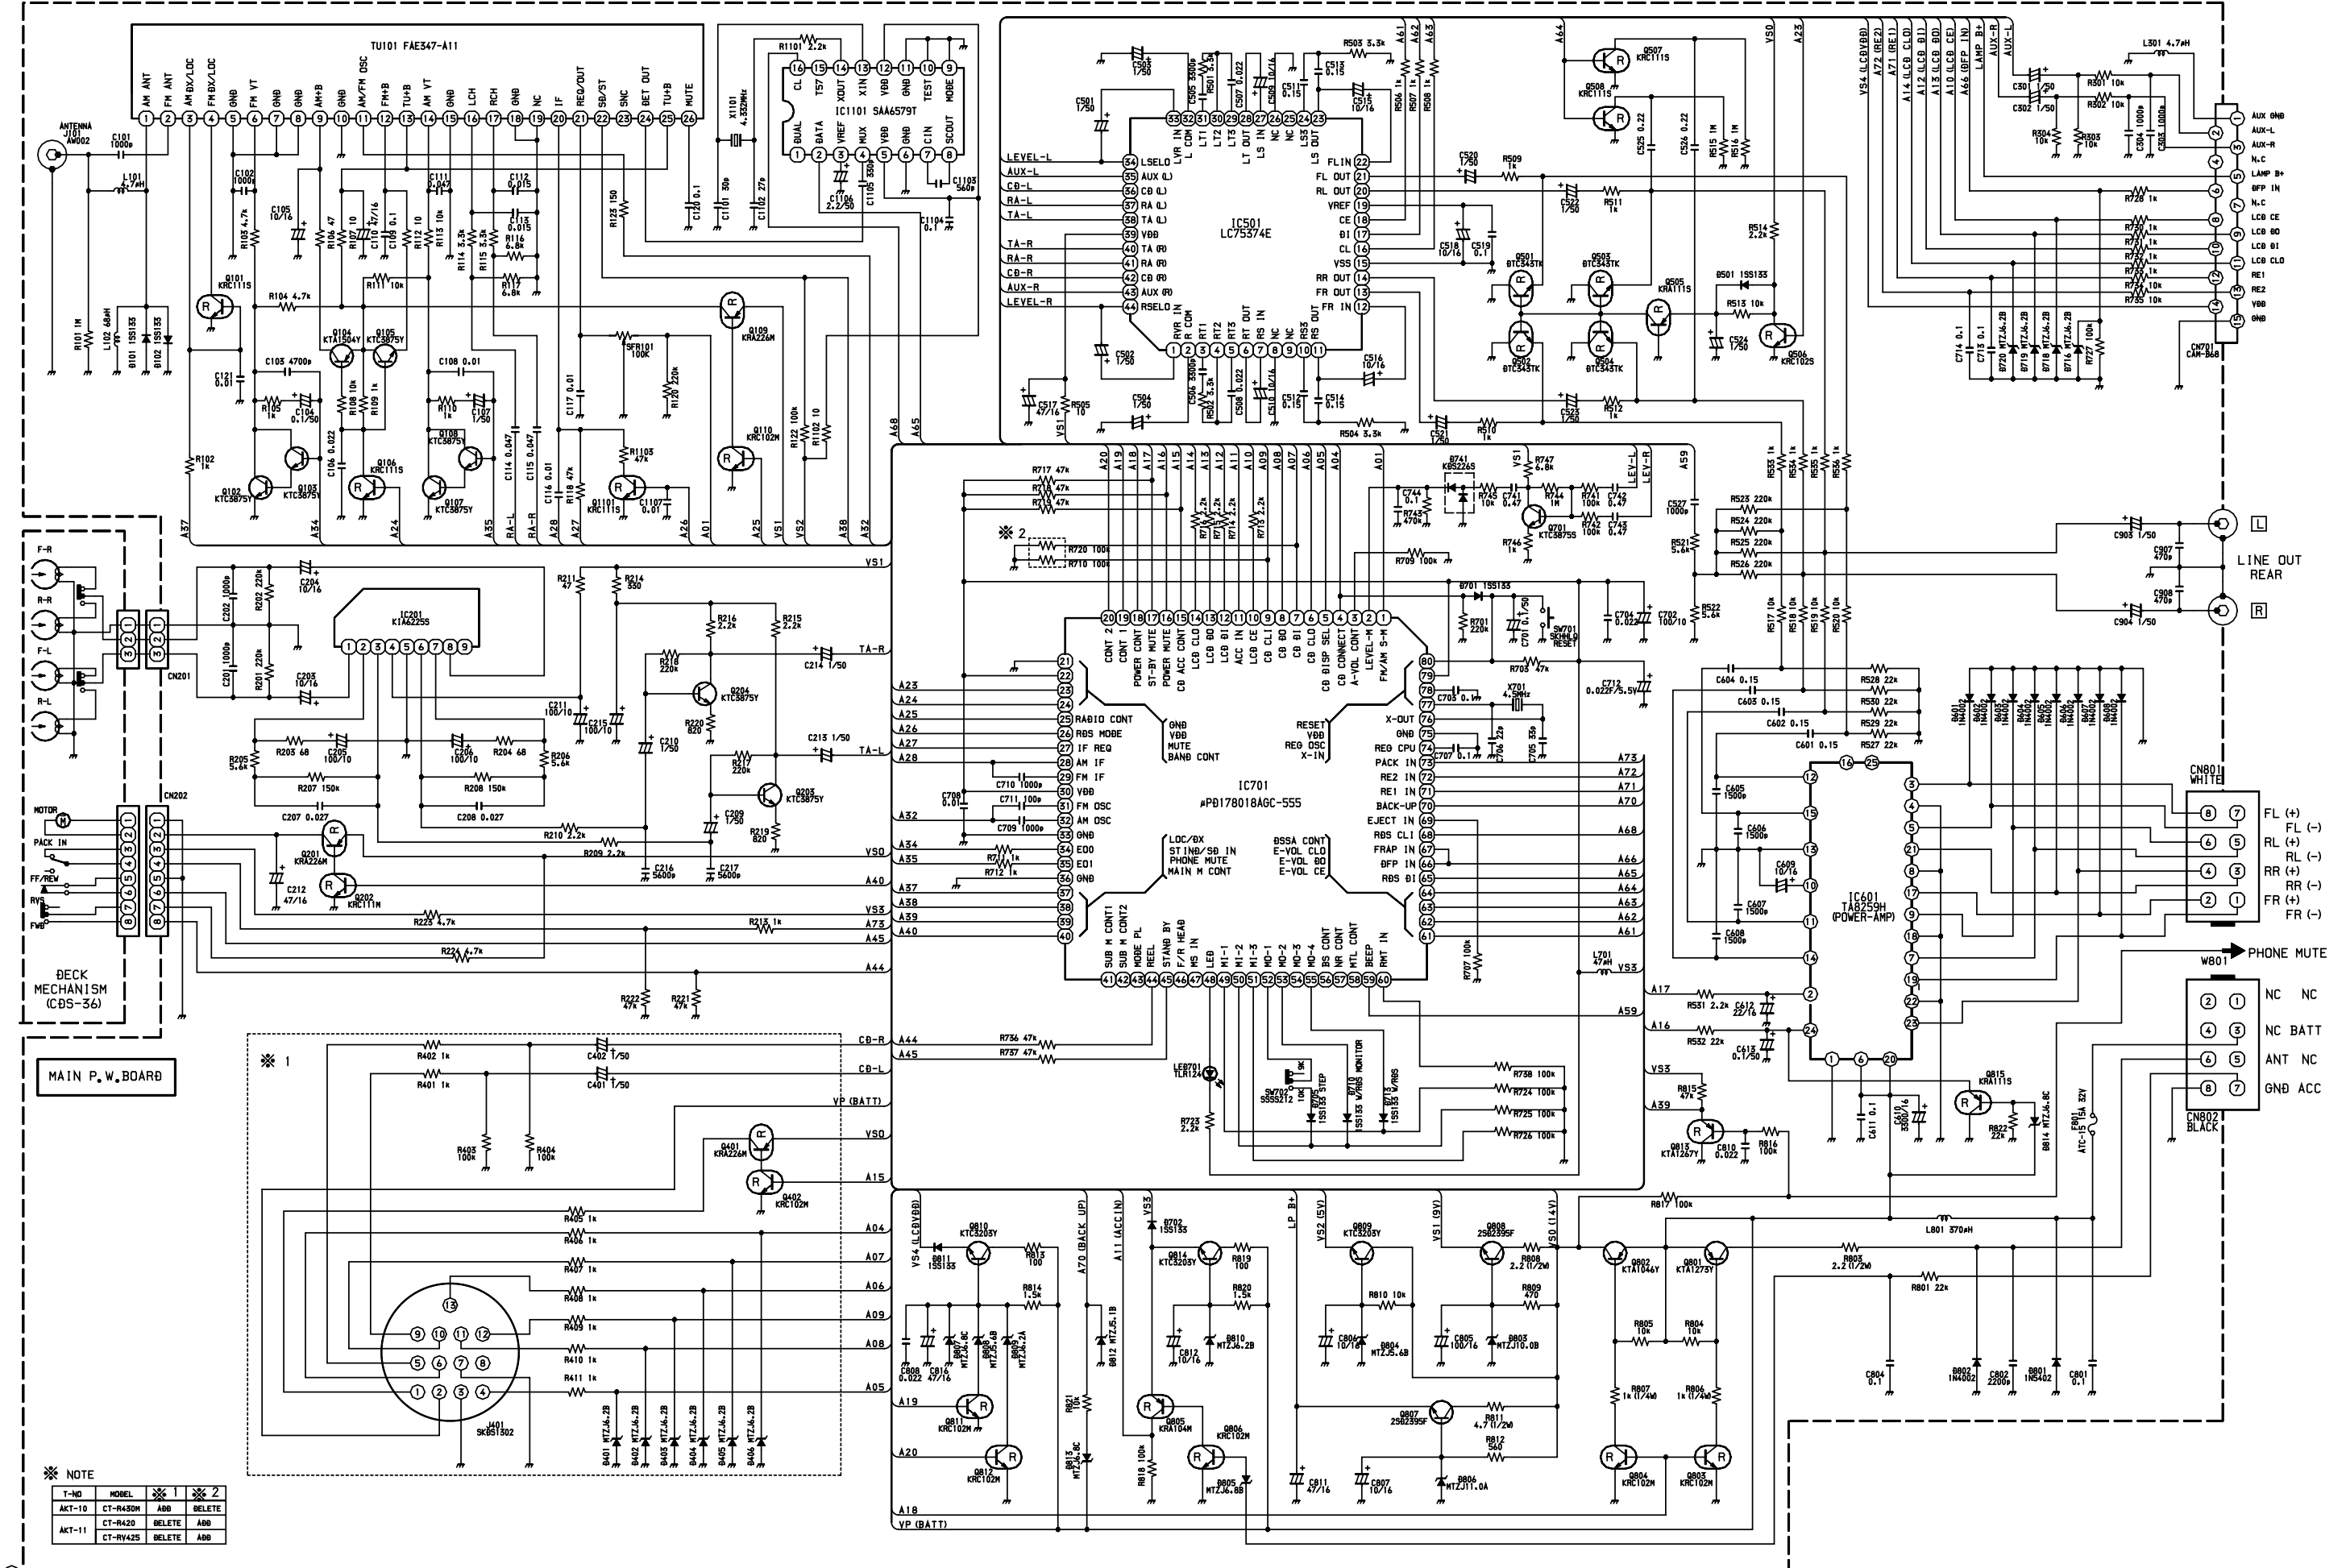


SCHEMATIC DIAGRAM-2 <R430M/R410/R420/RV425>

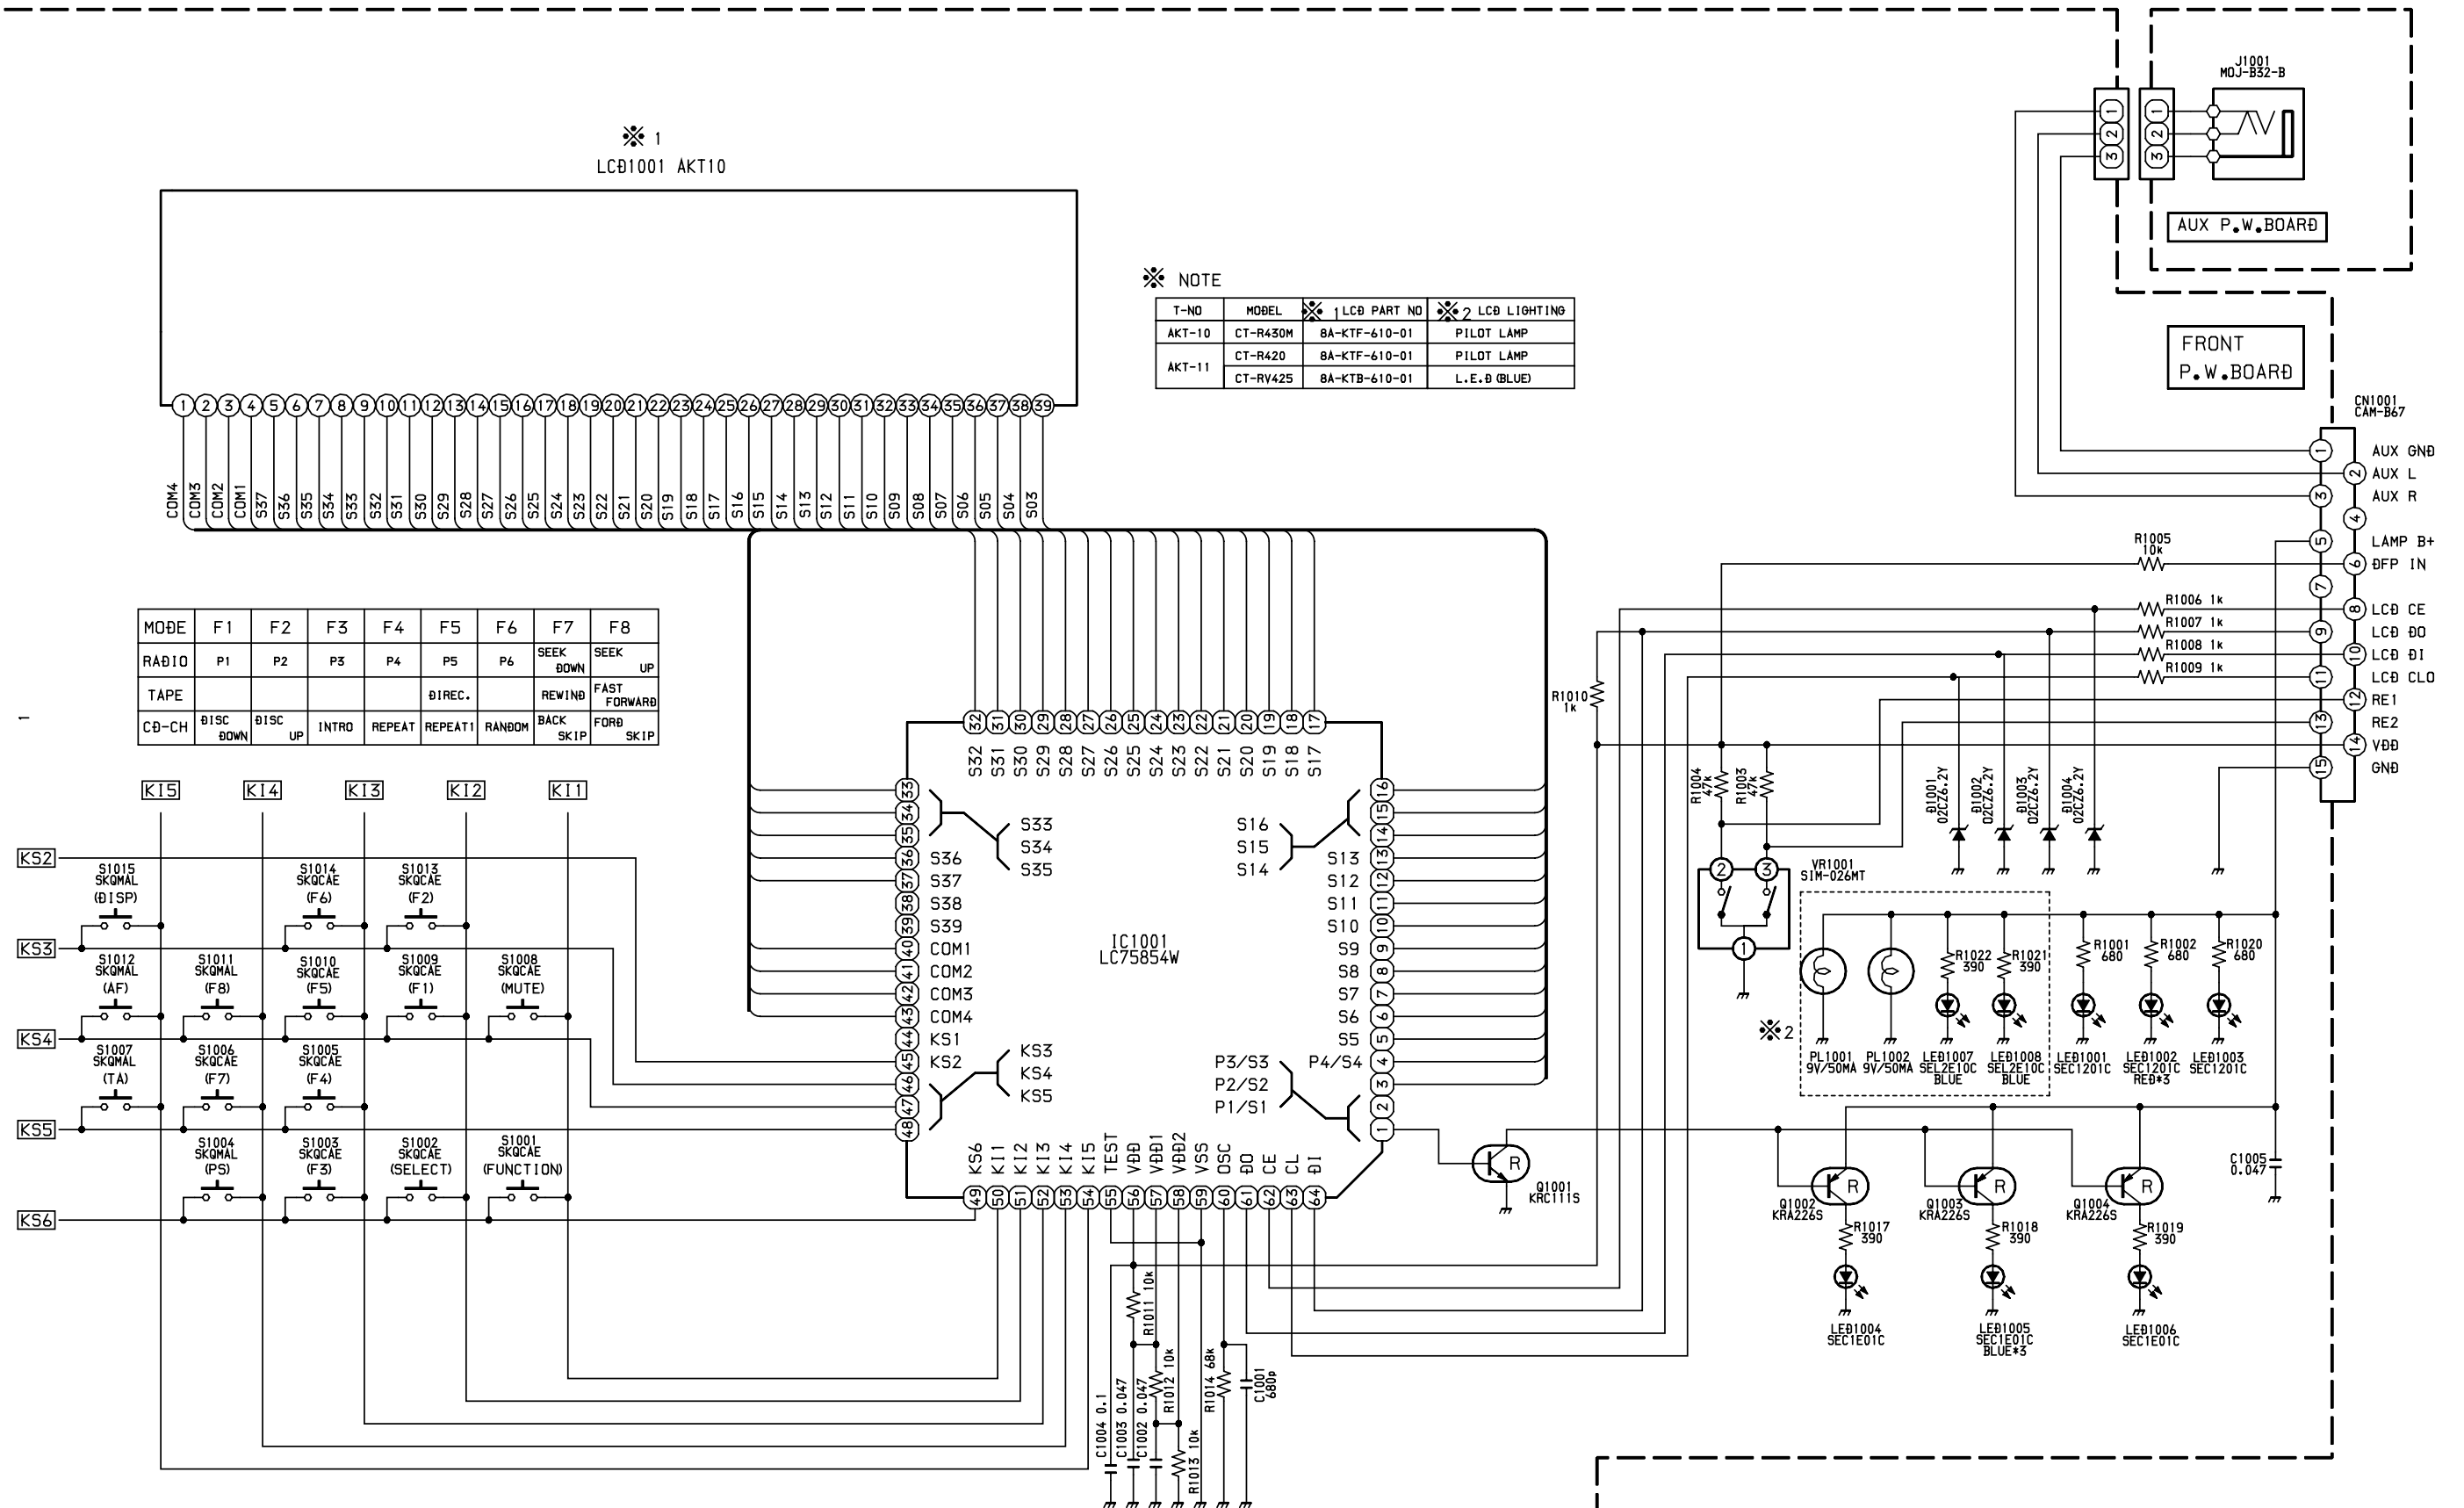

①

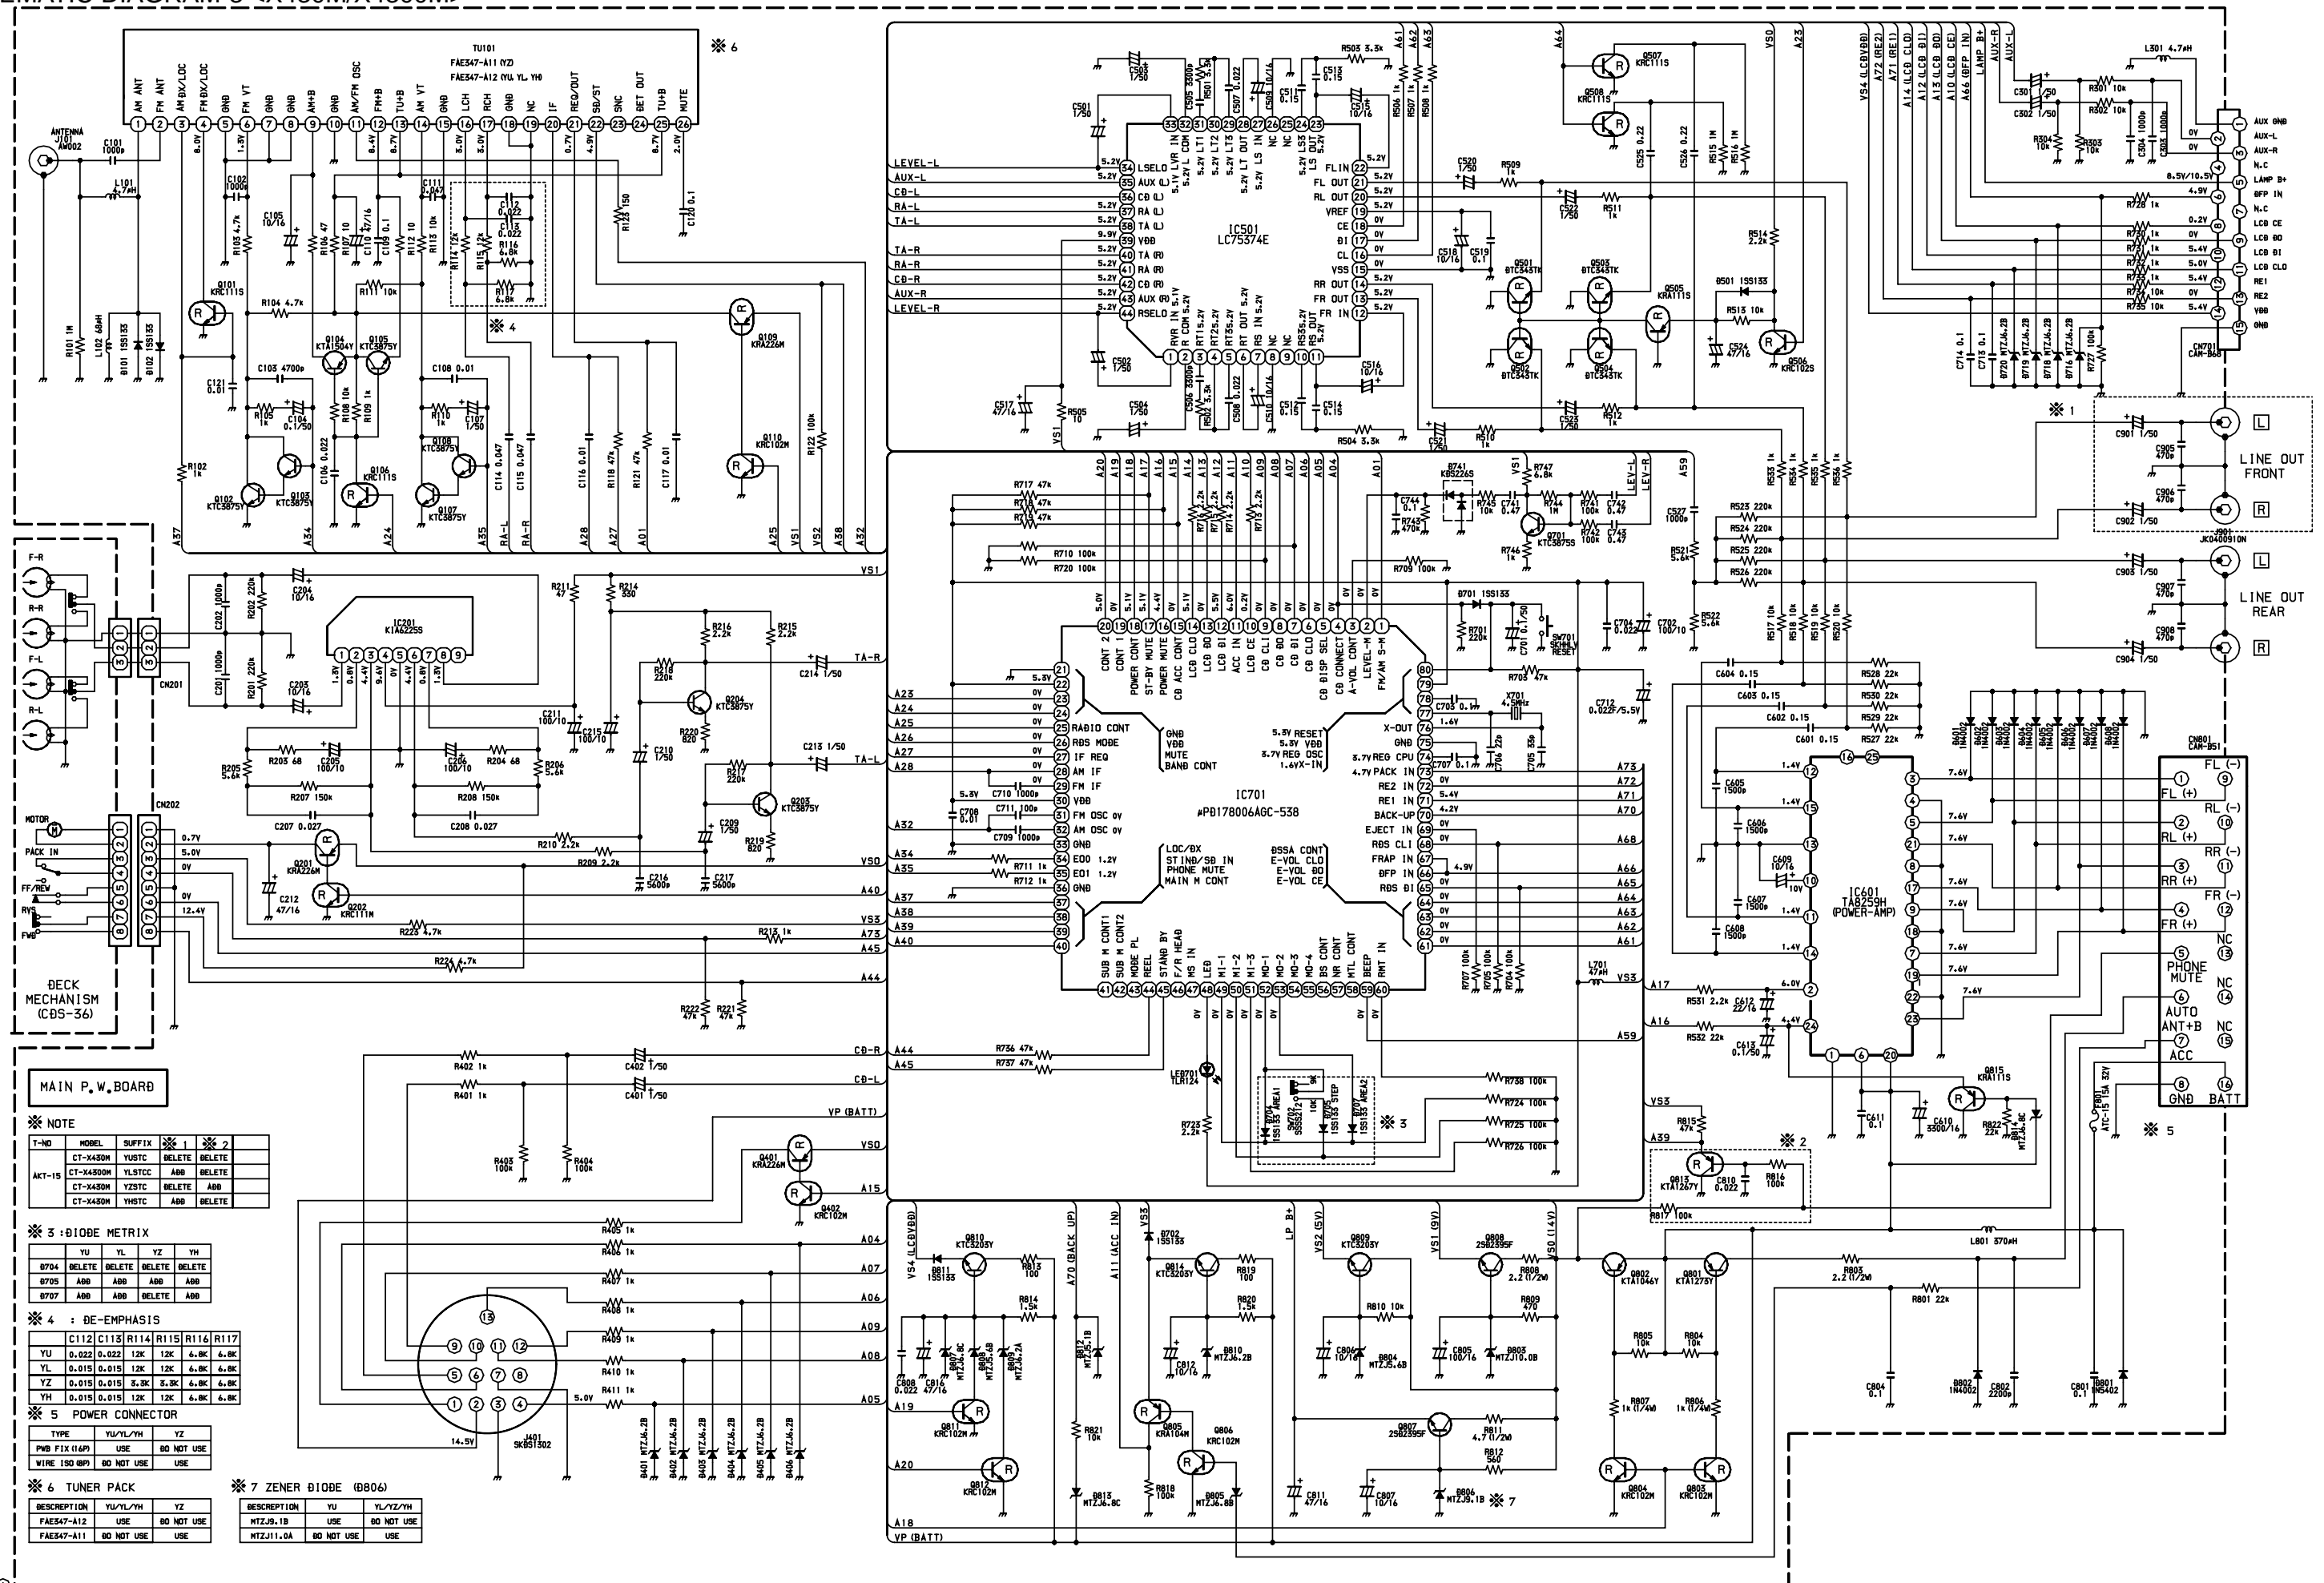

SCHEMATIC DIAGRAM-4 <X430M/X4300M>

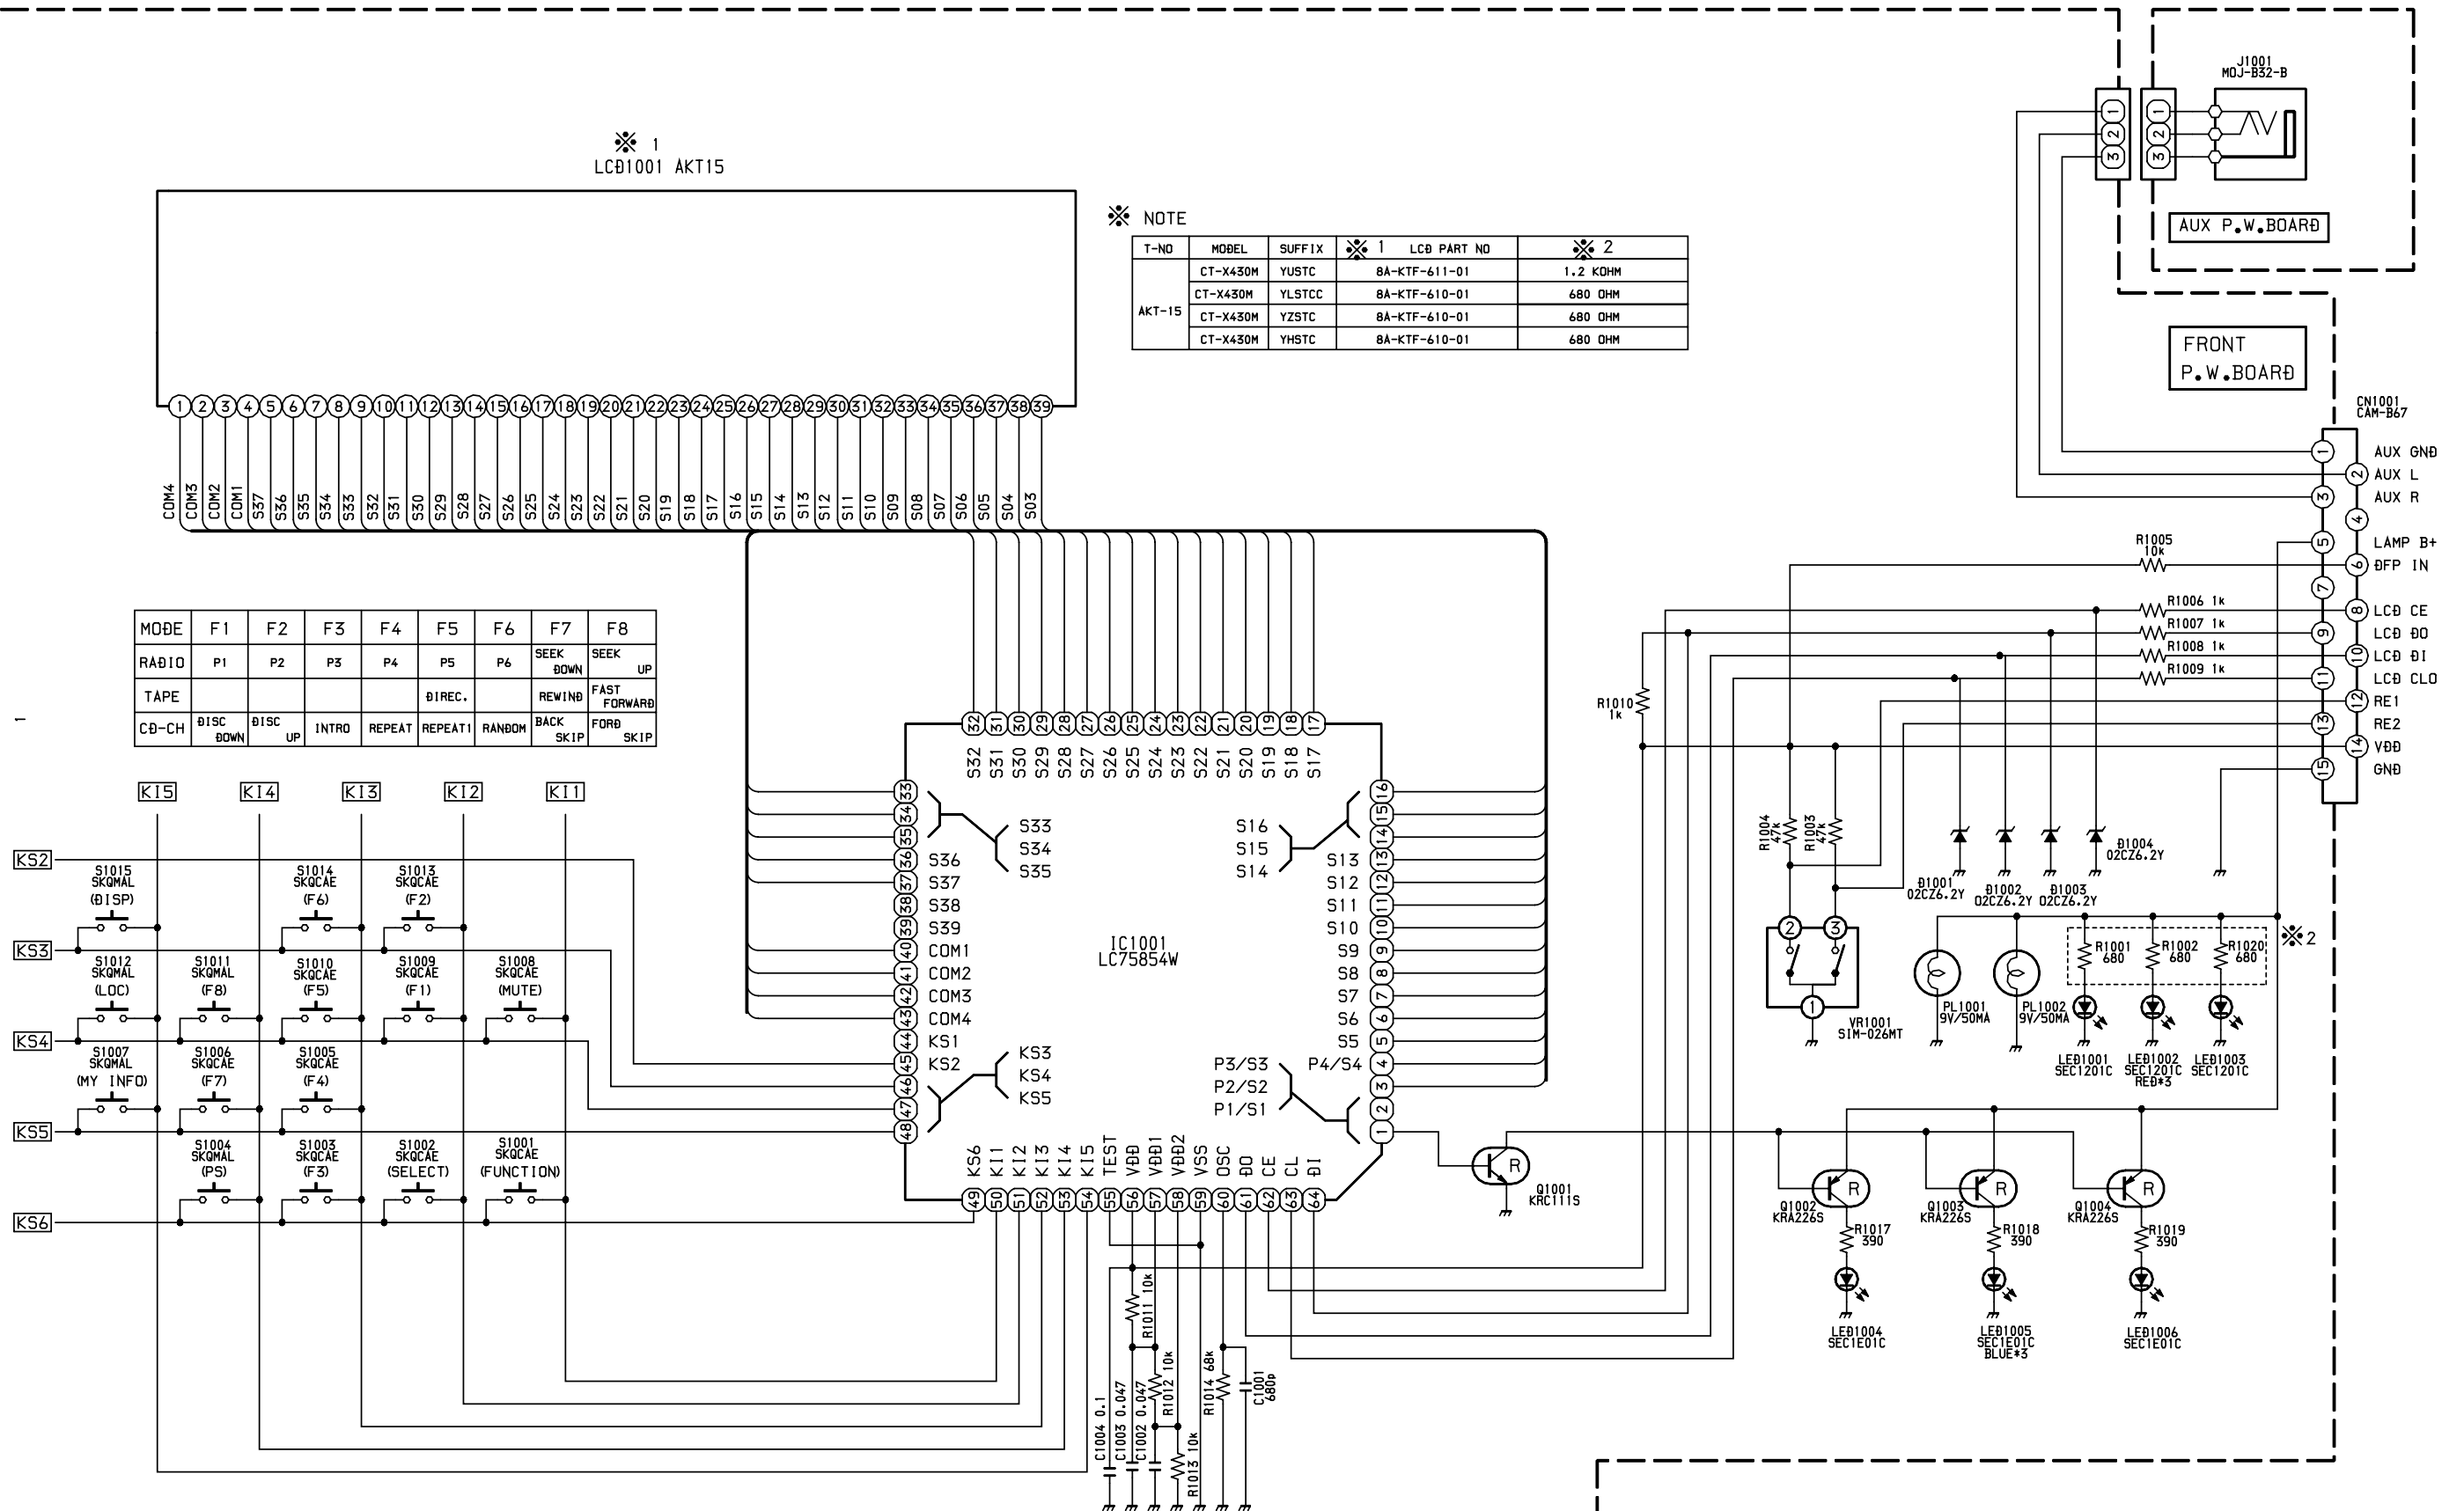

MECHANICAL PARTS LIST - 1

NOTE: The characters in the suffix column indicate the part usage.

R430M YZ	XX	A
R410 YZ	XX	B
R420 YZ	XX	C
RV425 YZ	XX	D
X430M YZ	XX	F
X430M YH	XX	G
X4300M YL	XX	H

REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
	8A-KT5-021-010		RING,RTRY A	A
	8A-KTA-001-010		WINDOW,LCD R430M	A
	8A-KTF-001-010		CABI,FRONT F	A
	8A-KTF-002-010		CABI,REAR F	A
	8A-KTF-003-010		CABI,TRIM F	A
	8A-KTF-004-010		WINDOW,L F	A
	8A-KTF-005-010		WINDOW,R F	A
	8A-KTF-014-010		CABI,BASE F	A
	8Z-KT1-023-110		DOOR,CASS	A
	8A-KT1-003-010		BTN,TA	A
	8A-KT1-004-010		BTN,AF	A
	8A-KT5-012-010		BTN,PWR	A
	8A-KT5-013-010		BTN,DISP	A
	8A-KT5-014-010		BTN,A/M	A
	8A-KTF-010-010		BTN,EJECT F	A
	8A-KTF-011-010		BTN,FF F	A
	8A-KTF-012-010		BTN,REW F	A
	8A-KTF-013-010		BTN,FNC F	A
	8A-KTF-015-010		BTN,DETACH	A
	8A-KTF-020-010		KNOB,RTRY NON RUBBER	A
	8A-KTG-003-010		BTN,UP/DN G	A
	8A-KTG-004-010		BTN,P.SET G	A
	87-KTE-205-010		SPR-C,EJ/FF/REW	A
	8A-KT5-204-010		HLDR,TR	A
	8A-KT5-210-010		HLDR,BTN MU	A
	8A-KT5-211-010		HLDR,BTN DISP	A
	8A-KTF-201-010		HLDR,IC F	A
	8A-KTF-202-010		HLDR,DECK F	A
	8A-KTF-204-010		HLDR,LCD F	A
	8A-KTF-205-010		LENS,ENCO F	A
	8A-KTF-206-010		LENS,R F	A
	8A-KTF-207-010		CASE,LCD F	A
	8A-KTF-208-010		LENS,LCD F	A
	8Z-KT1-211-010		COVER, TOP -T	A
	8Z-KT1-212-010		COVER, BOTTOM -T	A
	8Z-KT1-244-010		SPR-T,DOOR Z	A
	8Z-KT1-257-010		HLDR,ISO-WIRE -T	A
	8Z-KTA-203-010		LEVER,DFP LOCK -T10	A
	8Z-KTA-204-110		LEVER,DEF HOOK -T10	A
	8Z-KTA-221-010		SPR-C,DETACH LOCK-T10	A
	8Z-KTA-222-010		SPR-T,DETACH LOCK-T10	A
	8Z-KTA-223-010		SPR-C,RELEASE -T10	A
	8Z-KTG-207-010		CAP,LAMP BLU B2*4 ALC	A
	87-251-073-410	0E	SCREW,U+2.6-6	A
	87-251-097-410	0E	U+3-12	A
	87-432-903-010	0E	WASHER,WTE 2.6	A
	87-B10-259-010	0E	UT2+3.0-10.0 W/O SLOT (BH TAP)	A
	88-KT1-250-010		S-SCREW,THIN HEAD+2.6-4 BLK	A
	8Z-KT1-253-010		S-SCREW,PT 2*8 BH+ BLK	A
	87-A61-225-010	1A	JACK,PIN 2P XR-401	A
W 1001	8A-KT9-611-010		F-CABLE,3P 50MM	A
	8A-KT5-021-010		RING,RTRY A	BCD
	8A-KTB-001-010		WINDOW,LCD R420	C
	8A-KTB-002-010		WINDOW,LCD RV425	D
	8A-KTB-005-010		WINDOW,R B	B
	8A-KTB-006-010		WINDOW,L B	B
	8A-KTB-007-010		WINDOW,LCD R410	B
	8A-KTF-001-010		CABI,FRONT F	BCD
	8A-KTF-002-010		CABI,REAR F	BCD
	8A-KTF-003-010		CABI,TRIM F	BCD
	8A-KTF-004-010		WINDOW,L F	CD
	8A-KTF-005-010		WINDOW,R F	CD
	8A-KTF-014-010		CABI,BASE F	BCD
	8Z-KT1-023-110		DOOR,CASS	BCD
	8A-KT1-003-010		BTN,TA	CD
	8A-KT1-004-010		BTN,AF	BCD
	8A-KT5-012-010		BTN,PWR	CD
	8A-KT5-013-010		BTN,DISP	CD
	8A-KT5-014-010		BTN,A/M	CD
	8A-KTF-010-010		BTN,EJECT F	BCD
	8A-KTF-011-010		BTN,FF F	BCD
	8A-KTF-012-010		BTN,REW F	BCD
	8A-KTF-013-010		BTN,FNC F	BCD
	8A-KTF-015-010		BTN,DETACH	BCD
	8A-KTF-020-010		KNOB,RTRY NON RUBBER	BCD
	8A-KTG-003-010		BTN,UP/DN G	BCD
	8A-KTG-004-010		BTN,P.SET G	BCD
	87-KTE-205-010		SPR-C,EJ/FF/REW	BCD
	8A-KT5-204-010		HLDR,TR	BCD
	8A-KT5-210-010		HLDR,BTN MU	BCD
	8A-KT5-211-010		HLDR,BTN DISP	BCD

MECHANICAL PARTS LIST -2

	8A-KT5-219-010	HLDR,ISO-WIRE 5	.BCD.....
	8A-KTB-201-010	CASE,LCD B	...D.....
	8A-KTB-202-010	LENS,LCD B	...D.....
	8A-KTB-205-010	LENS,ENCO B	.B.....
	8A-KTF-201-010	HLDR,IC F	.BCD.....
	8A-KTF-202-010	HLDR,DECK F	.BCD.....
	8A-KTF-204-010	HLDR,LCD F	.BC.....
	8A-KTF-205-010	LENS,ENCO F	...CD.....
	8A-KTF-206-010	LENS,R F	.BCD.....
	8A-KTF-207-010	CASE,LCD F	.BC.....
	8A-KTF-208-010	LENS,LCD F	.BC.....
	8Z-KT1-211-010	COVER, TOP -T	.BCD.....
	8Z-KT1-212-010	COVER, BOTTOM -T	.BCD.....
	8Z-KT1-244-010	SPR-T,DOOR Z	.BCD.....
	8Z-KT4-201-010	COVER, CD BLIND -T	.BCD.....
	8Z-KTA-203-010	LEVER,DFP LOCK -T10	.BCD.....
	8Z-KTA-204-110	LEVER,DEF HOOK -T10	.BCD.....
	8Z-KTA-221-010	SPR-C,DETACH LOCK-T10	.BCD.....
	8Z-KTA-222-010	SPR-T,DETACH LOCK-T10	.BCD.....
	8Z-KTA-223-010	SPR-C,RELEASE -T10	.BCD.....
	8Z-KTG-207-010	CAP,LAMP BLU B2*4 ALC	...C.....
	8Z-KTG-209-010	CAP,LAMP ORN	.B.....
*	8A-KTB-203-010	HLDR,LCD B	...D.....
	87-251-073-410	OE SCREW,U+2.6-6	.BCD.....
	87-251-097-410	OE U+3-12	.BCD.....
	87-432-903-010	OE WASHER,WTE 2.6	.BCD.....
	87-B10-259-010	OE UT2+3.0-10.0 W/O SLOT (BH TAP)	.BCD.....
	88-KT1-250-010	S-SCREW,THIN HEAD+2.6-4 BLK	.BCD.....
W 1001	8Z-KT1-253-010	S-SCREW,PT 2*8 BH+ BLK	.BCD.....
	8A-KT9-611-010	F-CABLE,3P 50MM	.BCD.....
	8A-KT5-021-010	RING,RTRY A	...EFGH.....
	8A-KTF-001-010	CABI,FRONT F	...EFGH.....
	8A-KTF-002-010	CABI,REAR F	...EFGH.....
	8A-KTF-003-010	CABI,TRIM F	...EFGH.....
	8A-KTF-004-010	WINDOW,L F	...EFGH.....
	8A-KTF-005-010	WINDOW,R F	...EFGH.....
	8A-KTF-007-010	WINDOW,LCD F	...E.....
	8A-KTF-008-010	WINDOW,LCD X4300M	...H.....
	8A-KTF-009-010	WINDOW,LCD X430M 40W	...FG.....
	8A-KTF-014-010	CABI,BASE F	...EFGH.....
	8Z-KT1-023-110	DOOR,CASS	...EFGH.....
	8A-KT5-012-010	BTN,PWR	...EFGH.....
	8A-KT5-013-010	BTN,DISP	...EFGH.....
	8A-KT5-014-010	BTN,A/M	...EFGH.....
	8A-KT5-015-010	BTN,LO	...EFGH.....
	8A-KT5-016-010	BTN,INFO	...EFGH.....
	8A-KT5-017-010	BTN,UP/DN	...EFGH.....
	8A-KTF-010-010	BTN,EJECT F	...EFGH.....
	8A-KTF-011-010	BTN,FF F	...EFGH.....
	8A-KTF-012-010	BTN,REW F	...EFGH.....
	8A-KTF-013-010	BTN,FNC F	...EFGH.....
	8A-KTF-015-010	BTN,DETACH	...EFGH.....
	8A-KTF-020-010	KNOB,RTRY NON RUBBER	...EFGH.....
	8A-KTG-004-010	BTN,P.SET G	...EFGH.....
	87-KTE-205-010	SPR-C,EJ/FF/REW	...EFGH.....
	8A-KT5-204-010	HLDR,TR	...EFGH.....
	8A-KT5-210-010	HLDR,BTN MU	...EFGH.....
	8A-KT5-211-010	HLDR,BTN DISP	...EFGH.....
	8A-KT5-216-010	HLDR,DIN 13P	...EFGH.....
	8A-KTF-201-010	HLDR,IC F	...EFGH.....
	8A-KTF-202-010	HLDR,DECK F	...EFGH.....
	8A-KTF-204-010	HLDR,LCD F	...EFGH.....
	8A-KTF-205-010	LENS,ENCO F	...EFGH.....
	8A-KTF-206-010	LENS,R F	...EFGH.....
	8A-KTF-207-010	CASE,LCD F	...EFGH.....
	8A-KTF-208-010	LENS,LCD F	...EFGH.....
	8Z-KT1-211-010	COVER, TOP -T	...EFGH.....
	8Z-KT1-212-010	COVER, BOTTOM -T	...EFGH.....
	8Z-KT1-244-010	SPR-T,DOOR Z	...EFGH.....
	8Z-KT1-257-010	HLDR,ISO-WIRE -T	...F.....
	8Z-KT5-201-010	COVER, ISO BLIND -T	...E.GH.....
	8Z-KTA-203-010	LEVER,DFP LOCK -T10	...EFGH.....
	8Z-KTA-204-110	LEVER,DEF HOOK -T10	...EFGH.....
	8Z-KTA-221-010	SPR-C,DETACH LOCK-T10	...EFGH.....
	8Z-KTA-222-010	SPR-T,DETACH LOCK-T10	...EFGH.....
	8Z-KTA-223-010	SPR-C,RELEASE -T10	...EFGH.....
	8Z-KTG-207-010	CAP,LAMP BLU B2*4 ALC	...EFGH.....
	87-251-073-410	OE SCREW,U+2.6-6	...EFGH.....
	87-251-097-410	OE U+3-12	...EFGH.....
	87-432-903-010	OE WASHER,WTE 2.6	...EFGH.....
	87-B10-259-010	OE UT2+3.0-10.0 W/O SLOT (BH TAP)	...EFGH.....
	88-KT1-250-010	S-SCREW,THIN HEAD+2.6-4 BLK	...EFGH.....
	8Z-KT1-253-010	S-SCREW,PT 2*8 BH+ BLK	...EFGH.....
W 1001	8A-KT9-611-010	F-CABLE,3P 50MM	...EFGH.....

ACCESSORIES LIST

NOTE: The characters in the suffix column indicate the part usage.

R430M YZXX.....	A.....
R410 YZXX.....	B.....
R420 YZXX.....	C.....
RV425 YZXX.....	D.....
X430M YZXX.....	F.....
X430M YHXX.....	G.....
X4300M YLXX.....	H.....

REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
	8A-KT3-902-010		IB,INST,YZ (9L)-AF.....
	8A-KT5-902-010		IB,INST,YU,YL (3L,P)E..H.....
	8A-KT5-908-010		IB,INST,YH,Y (E CK CH A)-AG.....
	8A-KTF-901-010		IB,YU(3L) 430ME.....
	8A-KTF-902-010		IB,YL(3L) 4300MH.....
	8A-KTF-903-010		IB,YZ(9L) 430MF.....
	8A-KTF-904-010		IB,YH(E CK CH) 430MG.....
	8A-KT3-902-010		IB,INST,YZ (9L)-A	.BCD.....
	8A-KTA-901-010		IB,YZ(9L) R430M,420,RV425	.BCD.....
	8A-KT3-902-010		IB,INST,YZ (9L)-A	A.....
	8A-KTA-901-010		IB,YZ(9L) R430M,420,RV425	A.....
	86-KT1-237-010		HLDR,REAR MTGEFGH.....
	87-B10-141-010	0E	NUT,5 TYPE-2EFGH.....
*	87-B10-143-010	0E	UT1+5-15 W/O SLOTEFGH.....
	87-B10-144-010	0E	W,5.2-10-0.5EFGH.....
	87-B10-145-010	0E	W-SPR,5.3-8.5-1.5EFGH.....
*	88-KT1-247-010		S-SCREW,HEXAGONEFGH.....
	88-KT1-250-010		S-SCREW,THIN HEAD+2.6-4 BLKEFGH.....
	8Z-KT1-030-010		CASE,DFP -TEFGH.....
	8Z-KT1-231-010		HLDR,HALF -TEFGH.....
	8Z-KT1-232-010		KEY,REMOVE -TEFGH.....
*	8Z-KT1-251-010		S-SCREW,5*6 TH+ TAPPING STEFGH.....
*	8Z-KT1-625-010		CONN ASSY,16P SOC016E.GH.....
	86-KT1-237-010		HLDR,REAR MTG	.BCD.....
	87-B10-141-010	0E	NUT,5 TYPE-2	.BCD.....
*	87-B10-143-010	0E	UT1+5-15 W/O SLOT	.BCD.....
	87-B10-144-010	0E	W,5.2-10-0.5	.BCD.....
	87-B10-145-010	0E	W-SPR,5.3-8.5-1.5	.BCD.....
*	88-KT1-247-010		S-SCREW,HEXAGON	.BCD.....
	88-KT1-250-010		S-SCREW,THIN HEAD+2.6-4 BLK	.BCD.....
	8Z-KT1-030-010		CASE,DFP -T	.BCD.....
	8Z-KT1-231-010		HLDR,HALF -T	.BCD.....
	8Z-KT1-232-010		KEY,REMOVE -T	.BCD.....
*	8Z-KT1-251-010		S-SCREW,5*6 TH+ TAPPING ST	.BCD.....
	86-KT1-237-010		HLDR,REAR MTG	A.....
	87-B10-141-010	0E	NUT,5 TYPE-2	A.....
*	87-B10-143-010	0E	UT1+5-15 W/O SLOT	A.....
	87-B10-144-010	0E	W,5.2-10-0.5	A.....
	87-B10-145-010	0E	W-SPR,5.3-8.5-1.5	A.....
*	88-KT1-247-010		S-SCREW,HEXAGON	A.....
	88-KT1-250-010		S-SCREW,THIN HEAD+2.6-4 BLK	A.....
	8Z-KT1-030-010		CASE,DFP -T	A.....
	8Z-KT1-231-010		HLDR,HALF -T	A.....
	8Z-KT1-232-010		KEY,REMOVE -T	A.....
*	8Z-KT1-251-010		S-SCREW,5*6 TH+ TAPPING ST	A.....

